

DECLARATION

I, Toshikazu KIKO of FUJIMURA PATENT BUREAU, do hereby solemnly and sincerely declare:

1. That I am well acquainted with the Japanese and English Languages, and
2. That the attached document:

Patent Specification of Japanese Patent Application
No. 2002-096908 which is entitled

“ORGANIC ELECTROLUMINESCENCE DEVICE”

is a true translation into the English language.

AND I MAKE THIS SOLEMN DECLARATION conscientiously believing the same to be true and correct.

Tokyo, June 26, 2008



Toshikazu KIKO
FUJIMURA PATENT BUREAU

TK/mk

[Name of Documents]	Patent Application
[Reference Number]	5 6 P 0 4 9 3
[Filing Date]	March 29, 2002
[Address]	To the Commissioner of Patent Office
[International Patent Classification]	H05B 33/06
[Title of the Invention]	ORGANIC ELECTROLUMINESCENCE DEVICE
[Number of Claims]	13
[Inventor]	
[Address]	c/o Corporate Research and Development Laboratory, Pioneer Corporation, 6-1-1, Fujimi, Tsurugashima-shi, Saitama 350-2288, Japan
[Name]	Taishi TSUJI
[Inventor]	
[Address]	c/o Research & Development Laboratories, Nippon Steel Chemical Co., Ltd. 46-80, Sakinohama, Oaza Nakabaru, Tobata-ku, Kitakyushu-shi, Fukuoka 804-8503, Japan
[Name]	Hiroshi MIYAZAKI
[Applicant]	
[Discrimination Number]	000005016
[Name]	Pioneer Corporartion
[Applicant]	
[Discrimination Number]	000006644
[Name]	Nippon Steel Chemical Co., Ltd.

[Agent]

[Discrimination Number] 100079119

[Attorney]

[Name] Motohiko FUJIMURA

[Indication of charges]

[Method of Payment] Prepayment

[Prepayment Register Number] 016469

[Amount of Payment] ¥21000

[List of Attached Documents]

[Name of Document]	Specification	1
--------------------	---------------	---

[Name of Document]	Drawing(s)	1
--------------------	------------	---

[Name of Document]	Abstract	1
--------------------	----------	---


[Number of General Authorization]	9006557
-----------------------------------	---------

[DOCUMENT NAME] SPECIFICATION

[TITLE OF THE INVENTION] ORGANIC ELECTROLUMINESCENCE DEVICE

[Scope of claim for Patent]

[Claim 1] An organic electroluminescence device comprising:
an anode; a hole transport layer comprising an organic compound;
a light emitting layer having an organic compound; an electron
transport layer having an organic compound; and a cathode which
are stacked, characterized in that the light emitting layer
includes an organic host material represented by the following
structural formula (1):

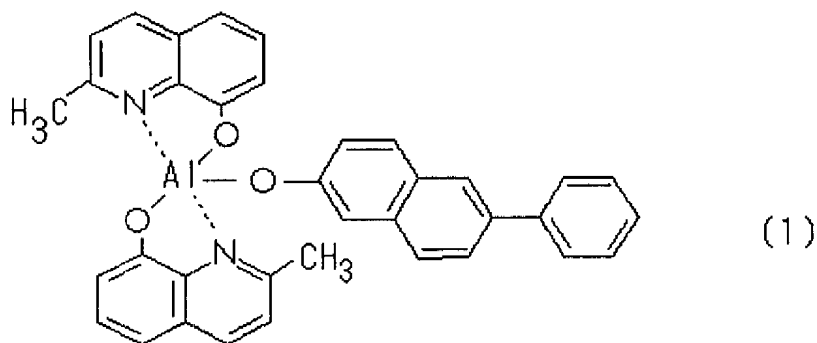


and a phosphorescent organic guest material.

[Claim 2] An organic electroluminescence device according to
claim 1, wherein a hole injection layer is provided between
the anode and the hole transportation.

[Claim 3] An organic electroluminescence device according to
claim 1 or 2, wherein an electron injection layer is provided
between the cathode and the electron transport layer.

[Claim 4] An organic electroluminescence device according to
any one of claims 1 to 3, wherein the phosphorescent organic
guest material comprises a porphyrin compound represented by


the following structural formula (2):

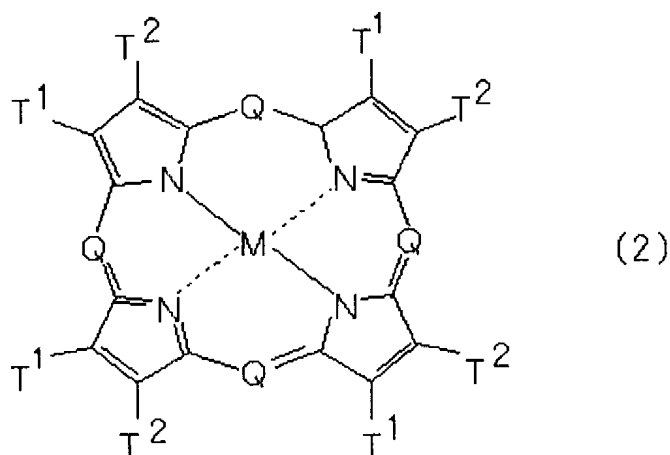

(in the structural formula (2), Q represents $-N=$ or $-C(R)=$, M represents a metal, a metal oxide, or a metal halide, R represents hydrogen, alkyl, aralkyl, aryl or alkaryl, or a halogenated substituent thereof, T^1 and T^2 each represents hydrogen or alkyl, or jointly represent a completed unsaturated six-membered ring including a halogen substituent, the six-membered ring is formed of carbon, sulfur and nitrogen ring atoms, and the alkyl moiety contains 1 to 6 carbon atoms).

[Claim 5] An organic electroluminescence device according to claim 4, wherein M in the phosphorescent organic guest material is platinum.


[Claim 6] An organic electroluminescence device according to any one of claims 1 to 3, wherein the phosphorescent organic guest material comprises a compound represented by the following structural formula (3):

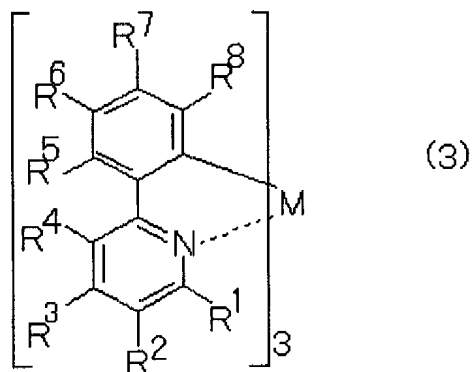

(in the structural formula (3), M represents a metal, R^1 to R^8 each independently includes a hydrogen atom, alkyl group, oxy group, amino group or a hydrocarbon group having at least one carbon atom in the substituent, the number of carbon atoms is 1 to 10 in each of the hydrocarbon moieties, further, R^1 to R^8 can be selected independently from cyano, halogen, and α -haloalkyl, α -haloalkoxy, amide, sulfonyl, carbonyl, carbonyloxy and oxycarbonyl substituents containing 10 or less carbon atoms, and further, R^1 together with R^2 , R^2 together with R^3 , R^3 together with R^4 , R^5 together with R^6 , R^6 together with R^7 , or R^7 together with R^8 can form a condensed benzo ring).

[Claim 7] An organic electroluminescence device according to claim 6, wherein M in the phosphorescent organic guest material is iridium.


[Claim 8] An organic electroluminescence device according to any one of claims 1 to 3, wherein the phosphorescent organic guest material comprises a compound represented by the following structural formula (4):

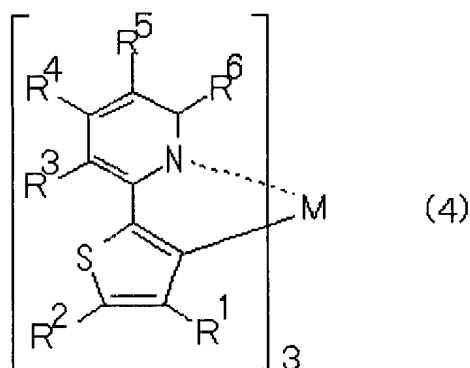

(in the structural formula (4), M represents a metal, R¹ to R⁶ each independently includes a hydrogen atom, alkyl group, oxy group, amino group or a hydrocarbon group having at least one carbon atom in the substituent, the number of carbon atoms is 1 to 10 in each of the hydrocarbon moieties, further, R¹ to R⁶ can be selected independently from cyano, halogen, and α-haloalkyl, α-haloalkoxy, amide, sulfonyl, carbonyl, carbonyloxy and oxycarbonyl substituents containing 10 or less carbon atoms and, further, R¹ together with R², R³ together with R⁴, R⁴ together with R⁵, or R⁵ together with R⁶ can form a condensed benzo ring).

[Claim 9] An organic electroluminescence device according to claim 8, wherein M in the phosphorescent organic guest material is iridium.

[Claim 10] An organic electroluminescence device according to any one of claims 1 to 3, wherein the phosphorescent organic guest material comprises a compound represented by the following structural formula (5):

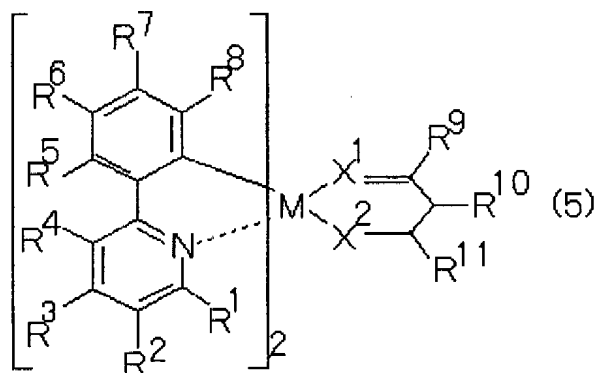


(in the structural formula (5), M represents a metal, X^1 and X^2 each independently represents an oxygen atom or a sulfur atom, R^1 to R^{11} each independently includes a hydrogen atom, alkyl group, oxy group, amino group, or a hydrocarbon group having at least one carbon atom in the substituent, the number of carbon atoms is 1 to 10 in each of the hydrocarbon moieties, further, R^1 to R^{11} can be selected independently from cyano, halogen, and α -haloalkyl, α -haloalkoxy, amide, sulfonyl, carbonyl, carbonyloxy and oxycarbonyl substituents containing 10 or less carbon atoms and, further, R^1 together with R^2 , R^2 together with R^3 , R^3 together with R^4 , R^5 together with R^6 , R^6 together with R^7 , R^7 together with R^8 , or R^8 together with R^9 can form a condensed benzo ring).

[Claim 11] An organic electroluminescence device according to claim 10, wherein M for the phosphorescent organic guest material is iridium.

[Claim 12] An organic electroluminescence device according to any one of claims 1 to 3, where in phosphorescent organic guest material comprises a compound represented by the following

structural formula (6):

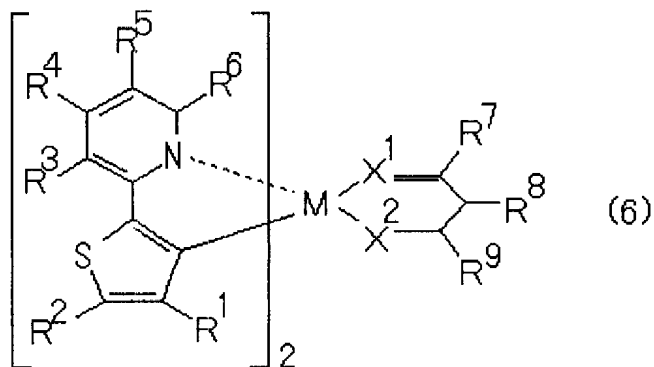

(in the structural formula (6), M represents a metal, X¹ and X² each independently represents an oxygen atom or a sulfur atom, R¹ to R⁹ each independently includes a hydrogen atom, alkyl group, oxy group, amino group or a hydrocarbon group having at least one carbon atom in the substituent, the number of carbon atoms is 1 to 10 in each of the hydrocarbon moieties, further, R¹ to R⁹ can be selected independently from cyano, halogen, and α -haloalkyl, α -haloalkoxy, amide, sulfonyl, carbonyl, carbonyloxy and oxycarbonyl substituents containing 10 or less of carbon atoms and, further, R¹ together with R², R³ together with R⁴, R⁴ together with R⁵, R⁵ together with R⁶, R⁷ together with R⁸, R⁸ together with R⁹, R⁹ together with R¹⁰, or R¹⁰ together with R¹¹ can form a condensed benzo ring).

[Claim 13] An organic electroluminescence device according to claim 12, wherein M in the phosphorescent organic guest material is iridium.

[Detailed Description of the Invention]

[0001]

[Technical Field to which the Invention pertains]

The present invention relates to an organic electroluminescence device (hereinafter referred to as an organic EL device) utilizing electroluminescence of an organic compound that emits light by current injection, and having a light emitting layer in which the substance is formed in a layered state.

[0002]

[Prior Art]

In general, each of organic EL devices using an organic material and constituting a display panel has a structure in that an anode as a transparent electrode, plural organic material layers including an organic light emitting layer and a cathode comprising a metal electrode are successively layered each as a thin film on a glass substrate as a display surface. In addition to the organic light emitting layer, the organic material layer includes a layer comprising a material having a hole transportability such as a hole injection layer and a hole transport layer, and a layer comprising a material having electron transportability such as an electron transport layer and an electron injection layer, and an organic EL device of a constitution provided with them has also been proposed. The electron injection layer also contains an inorganic compound.

[0003]

When an electric field is applied to an organic EL device of a stacked body of an organic light emitting layer and an electron or hole transport layer, holes are injected from the anode and electrons are injected from the cathode. The organic

EL device utilizes emission of light that is emitted when the electrons and the holes are recombined in the organic light emitting layer to form exciters and they are returned to the ground state. For making the luminous efficiency higher and stably driving the device, a dye is sometimes doped as a guest material to the light emitting layer.

[0004]

In recent years, in addition to the fluorescence material, use of a phosphorescence material for the light emitting layer has also been proposed, since it is considered that the probability for the occurrence of singlet exciters and triplet exciters after recombination of electrons and holes in the light emitting layer of the organic EL device is 1:3 and it is considered that a device also utilizing phosphorescence caused by the triplet exciters can attain the luminous efficiency three to four times as high as the device using fluorescence caused by the singlet exciters.

[0005]

On the other hand, for reducing the power consumption improvement of the luminous efficiency and improvement of the driving stability of the organic EL device, it has been proposed to provide a hole blocking layer between the organic light emitting layer and the cathode for restricting the movement of the holes from the organic light emitting layer. By efficient accumulation of the holes in the light emitting layer by the hole blocking layer, the recombination probability with electrons can be improved to attain higher luminous efficiency.

As the hole blocking material, it has been reported that phenanthroline derivatives and triazole derivatives are effective (refer to JP-A No. 8-109373 and JP-A No. 10-233284).
[0006]

In existent organic EL devices utilizing phosphorescence emission, hole transporting materials capable of transporting holes have been used for the light emitting layer host material and materials having higher ionizing potential energy (I_p) than the post material of the light emitting layer such as phenanthroline derivatives, for example, 2,9-dimethyl-4,7-diphenyl-1,10-phenanthroline, i.e., BCP or aluminum chelate complex, for example, ((1,1'-biphenyl)-4-olato)bis(2-methyl-8-quinolinolato NI, 08) aluminum, i.e., BALq are used as the hole blocking layer in the layer adjacent cathode of the light emitting layer. In a case of using BCP for the hole blocking layer, while the emission characteristics at the initial stage are favorable, it involves a drawback that the driving life is extremely short. At present, materials having sufficiently high I_p and excellent in durability have not been known.

[0007]

BALq is excellent in durability but has a drawback of poor hole blocking ability since I_p is not sufficiently high. Accordingly, in a case of using BALq as the hole blocking layer and tris(8-hydroxyquinolateo N1, 08) aluminum, i.e., Alq3 as the electron transport layer, the electron transport layer emits light. In the organic electroluminescence device utilizing

red phosphorescence emission, the emission of Alq3 (green) results in deterioration of chromaticity (orange instead of red).

[0008]

[Problem to be solved by the Invention]

While it is effective to provide a light emitting layer of an organic phosphorescence material and a hole blocking layer for increasing the luminous efficiency of the organic EL device, it is necessary to further prolong the life of the device. It has been demanded for an organic EL device of high luminance efficiency that is continuously driven to emit light at high luminance with small quantity of current.

[0009]


It is an object of the present invention to provide an organic EL device capable of prolonging the life.

[0010]

[Measure taken to solve the problem]

An organic electroluminescence device according to the invention is an organic electroluminescence device obtained by stacking an anode, a hole transport layer comprising an organic compound, a light emitting layer comprising an organic compound, an electron transport layer comprising an organic compound and a cathode characterized in that the light emitting layer comprises an organic host material represented by the following structural formula (1):

[0011]

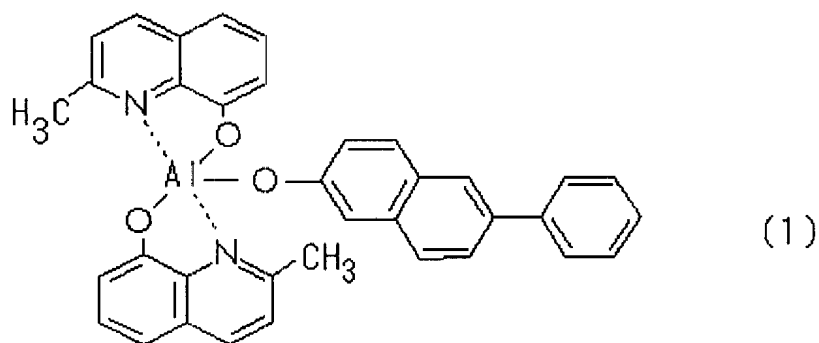

[0012]

and a phosphorescent organic guest material.


The electroluminescence device according to the invention is characterized in that a hole injection layer is provided between the anode and the hole transportation.

The electroluminescence device according to the invention is characterized in that an electron injection layer is provided between the cathode and the electron transport layer.

[0013]

The organic electroluminescence device according to the invention is characterized in that the phosphorescent organic guest material comprises a porphyrin compound represented by the following structural formula (2):

[0014]

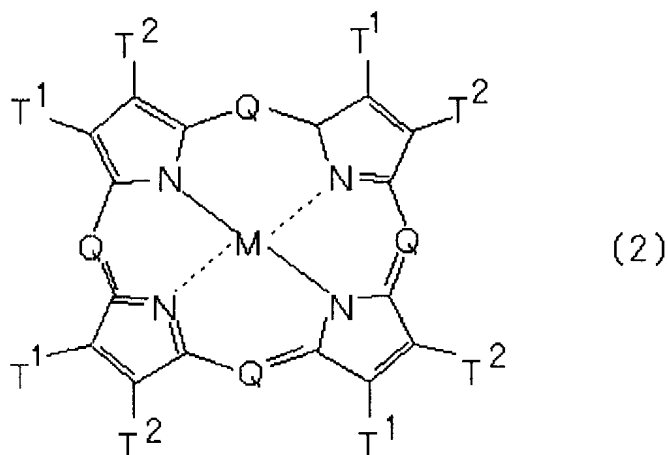

[0015]


(in the structural formula (2), Q represents $-N=$ or $-C(R)=$, M represents a metal, a metal oxide or a metal halide, R represents hydrogen, alkyl, aralkyl, aryl or alkaryl, or a halogenated substituent thereof, T^1 and T^2 each represents hydrogen or alkyl, or jointly represent a completed unsaturated six-membered ring including a halogen substituent, the six-membered ring is formed of carbon, sulfur and nitrogen ring atoms, and the alkyl moiety contains 1 to 6 carbon atoms).

[0016]

The organic electroluminescence device according to the invention is characterized in that M in the phosphorescent organic guest material is platinum.

The organic electroluminescence device according to the invention is characterized in that the phosphorescent organic guest material comprises a compound represented by the following structural formula (3):

[0018]

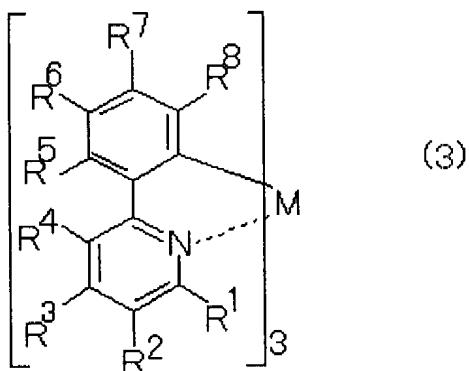

(in the structural formula (3), M represents a metal, R^1 to R^8 each independently includes a hydrogen atom, alkyl group, oxy group, amino group or a hydrocarbon group having at least one carbon atom in the substituent, the number of carbon atoms is 1 to 10 in each of the hydrocarbon moieties, further, R^1 to R^8 can be selected independently from cyano, halogen, and α -haloalkyl, α -haloalkoxy, amide, sulfonyl, carbonyl, carbonyloxy and oxycarbonyl substituents containing 10 or less carbon atom and, further, R^1 together with R^2 , R^2 together with R^3 , R^3 together with R^4 , R^5 together with R^6 , R^6 together with R^7 , or R^7 together with R^8 can form a condensed benzo ring).


[0019]

The organic electroluminescence device according to the invention is characterized in that M for the phosphorescent organic guest material is iridium.

The organic electroluminescence device according to the invention is characterized in that the phosphorescent organic

guest material comprises a compound represented by the following structural formula (4):

[0020]

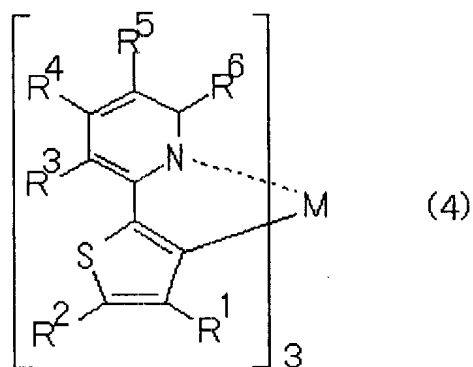

[0021]


(in the structural formula (4), M represents a metal, R^1 to R^6 each independently includes a hydrogen atom, alkyl group, oxy group, amino group, or a hydrocarbon group having at least one carbon atom in the substituent, the number of carbon atoms is 1 to 10 in each of the hydrocarbon moieties, further, R^1 to R^6 can be selected independently from cyano, halogen, and α -haloalkyl, α -haloalkoxy, amide, sulfonyl, carbonyl, carbonyloxy and oxycarbonyl substituents containing 10 or less of carbon atoms and, further, R^1 together with R^2 , R^3 together with R^4 , R^4 together with R^5 , or R^5 together with R^6 can form a condensed benzo ring).

[0022]

The organic electroluminescence device according to the invention is characterized in that M in the phosphorescent organic guest material is iridium.

The organic electroluminescence device according to the invention is characterized in that the phosphorescent organic guest material comprises a compound represented by the following structural formula (5):

[0023]

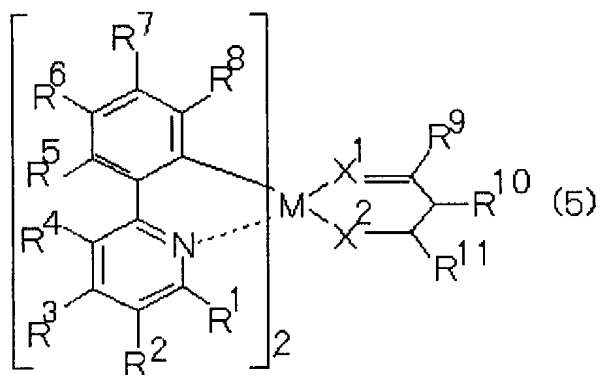

[0024]

(in the structural formula (5), M represents a metal, X¹ and X² each independently represents an oxygen atom or a sulfur atom, R¹ to R¹¹ each independently includes a hydrogen atom, alkyl group, oxy group, amino group, or a hydrocarbon group having at least one carbon atom in the substituent, the number of carbon atoms is 1 to 10 in each of the hydrocarbon moieties, further, R¹ to R¹¹ can be selected independently from cyano, halogen, and α-haloalkyl, α-haloalkoxy, amide, sulfonyl, carbonyl, carbonyloxy and oxycarbonyl substituents containing


10 or less carbon atoms and, further, R¹ together with R², R² together with R³, R³ together with R⁴, R⁵ together with R⁶ or R⁶ together with R⁷, R⁷ together with R⁸, R⁸ together with R⁹, or R¹⁰ together with R¹¹ can form a condensed benzo ring).

[0025]

The organic electroluminescence device according to the invention is characterized in that M for the phosphorescent organic guest material is iridium.

The organic electroluminescence device according to the invention is characterized in that the phosphorescent organic guest material comprises a compound represented by the following structural formula (6):

[0026]

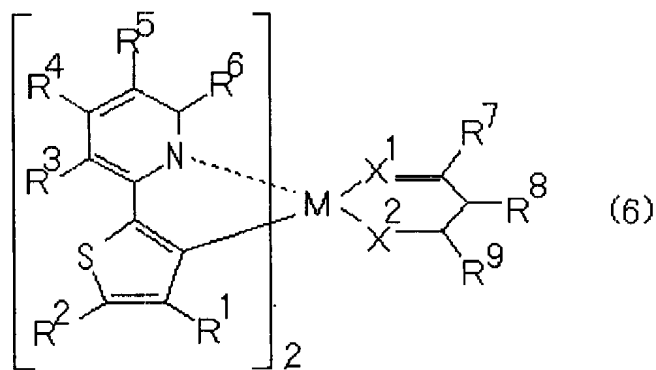

[0027]

(in the structural formula (6), M represents a metal, X¹ and X² each independently represents an oxygen atom or a sulfur atom, R¹ to R⁹ each independently includes a hydrogen atom, alkyl group, oxy group, amino group or a hydrocarbon group having at least one carbon atom in the substituent, the number of carbon

atoms is 1 to 10 in each of the hydrocarbon moieties, further, R^1 to R^9 can be selected independently from cyano, halogen, and α -haloalkyl, α -haloalkoxy, amide, sulfonyl, carbonyl, carbonyloxy and oxycarbonyl substituents containing 10 or less of carbon atoms and, further, R^1 together with R^2 , R^3 together with R^4 , R^4 together with R^5 , R^5 together with R^6 , R^7 together with R^8 , or R^8 together with R^9 can form a condensed benzo ring).
[0028]

The organic electroluminescence device according to the invention is characterized in that M for the phosphorescent organic guest material is iridium.
[0029]


[Embodiments of the Invention]

Embodiments of the present invention are to be described with reference to the drawings.

An organic EL device according to the invention comprises, as shown in Fig. 1, at least an anode 2, a hole transport layer 3, a light emitting layer 4, an electron transport layer 6 and a cathode 7, which is obtained by stacking, on a transparent substrate 1 for example made of glass, a transparent anode 2, a hole transport layer 3 comprising an organic compound, a light emitting layer 4 comprising an organic compound, an electron transport layer 6 comprising an organic compound and a metal cathode 7 made, for example, of a material with low work function. In the organic EL device according to the invention, the light emitting layer 4 is an organic material having an electron transportability doped with an organic host material

represented by the following structural formula (1):

[0030]

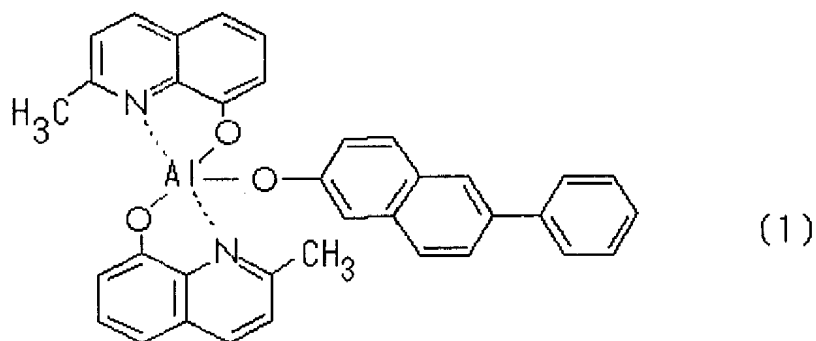

[0031]

and a phosphorescent material as an organic guest material. In the light emitting layer 4, the organic guest material is preferably doped such that a kind of material is doped at a ratio of from 4 to 10% by weight based on the entire kinds of materials.

An example of a specific organic EL element includes a constitution of using ITO for the anode, 4,4-bis(N-(naphthyl)-N-phenyl-amino)biphenyl, i.e., NPB (Ip=5.4eV), for the hole transport layer, an organic host material represented by the structural formula (1) for the light emitting layer, Alq3 for the electron transport layer and an aluminum for the cathode. The glass transition temperature of the compound of the structural formula (1) is 113°C which is higher by about 15°C than that of BAlq as the known compound having a similar structure. This enables further stabilization

for the electrical and physical characteristics of the thin film in the organic EL device, high storability at high temperature and suppression for the degradation of luminance during continuous driving. Further, the ligand of the compound of the structural formula (1) has a longer conjugation system compared with biphenol as the ligand for BAlq and the electron transportability is improved as well. Accordingly, the compound of the structural formula (1) is effective as a material for the organic electric field light emitting material.

[0032]

In addition to the structure described above, another organic EL device structure also includes as shown in Fig. 2, a structure in which an electron injection layer 7a made of Li_2O , etc. is stacked and deposited as a thin film between the electron transport layer 6 and the cathode 7.

In addition to the structure described above, a further organic EL device structure also includes as shown in Fig. 3, a structure in which a hole injection 3a such as made of a porphyrin compound, for example, copper phthalocyanine (CuPc) stacked and deposited as a thin film between the anode 2 and the hole transport layer 3.

[0033]


For the cathode 1, a material comprising a metal of a small work function, for example, aluminum, magnesium, indium, silver or an alloy for each of them and having a thickness of about 100 to 5000 Angstrom can be used. Further, for the anode 2, a conductive material of large work function, for example,

indium tin oxide (hereinafter referred to as ITO) and having a thickness of about 1000 to 3000 angstrom or gold having a thickness of about 800 to 1500 angstrom can be used. In a case of using gold for the electrode material, the electrode is in a semi-transparent state. It may suffice that one of the cathode and the anode is transparent or semi-transparent.


[0034]

In the embodiment, the ingredient contained in the hole transport layer 3 is a substance having a hole transportability, for example, represented by the following formulae (7) to (32).


[0035]

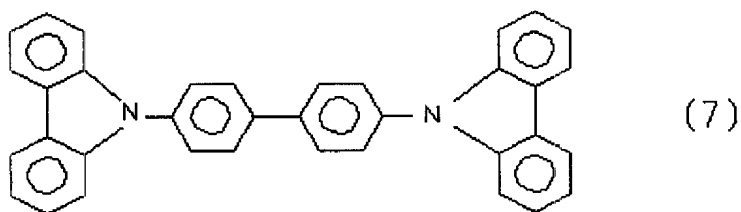


[0036]

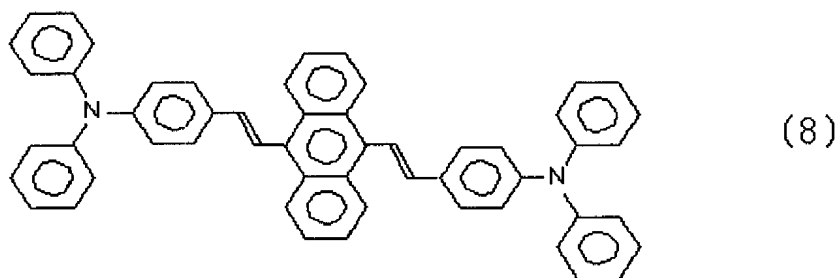


[0037]

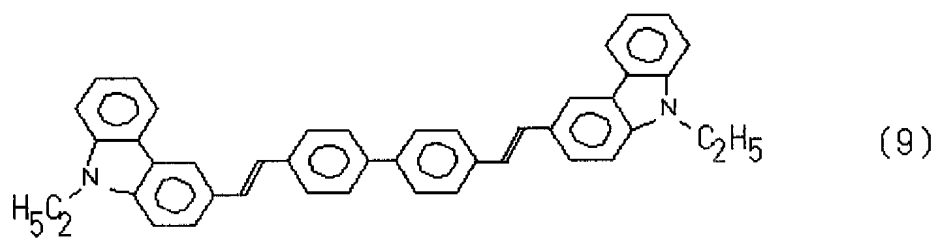


[0038]

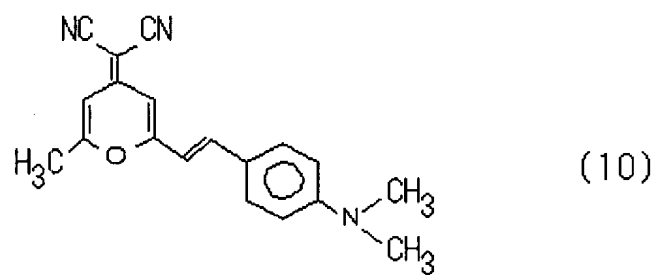


[0039]

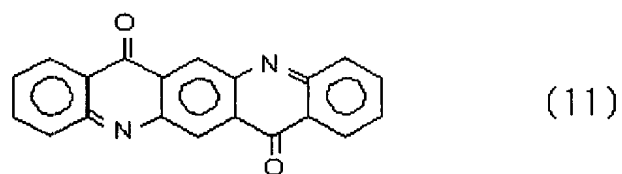

[0040]

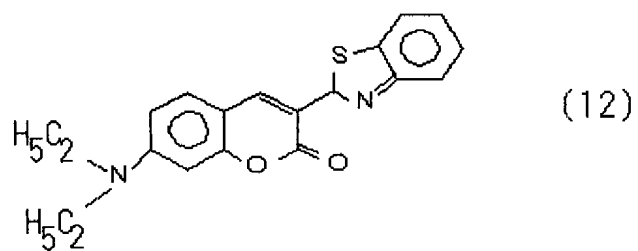


[0041]




(13)

[0042]

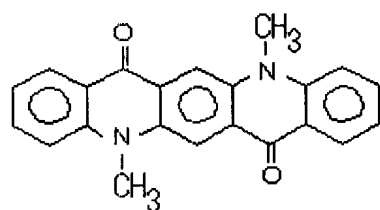


(14)

[0043]

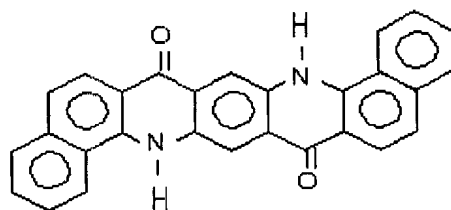


(15)


[0044]

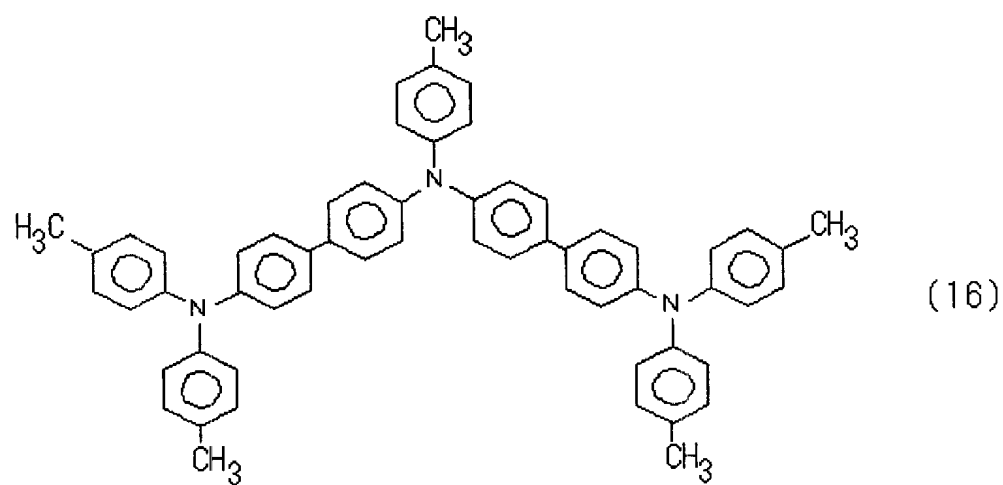


[0045]

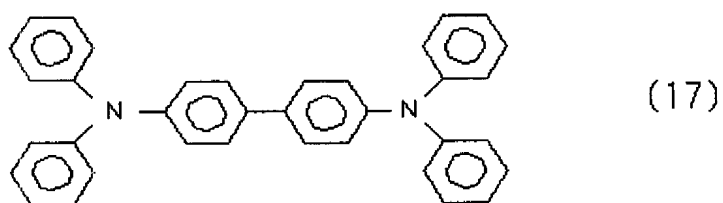


[0046]

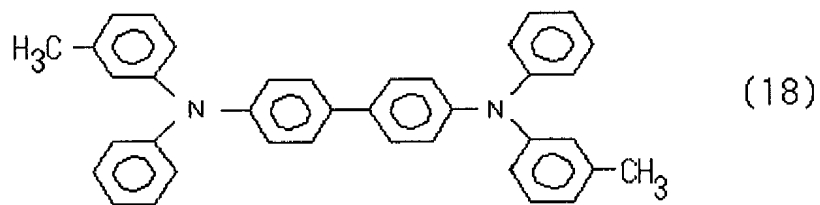


[0047]

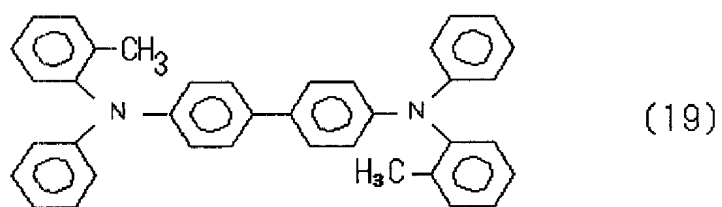


[0048]

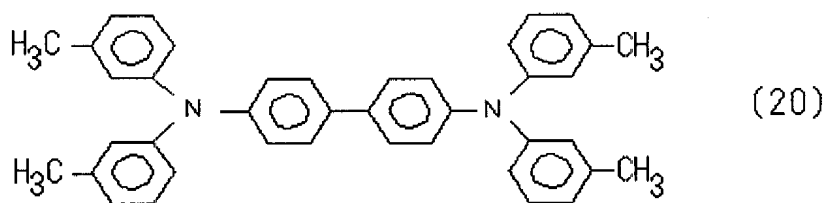


[0049]

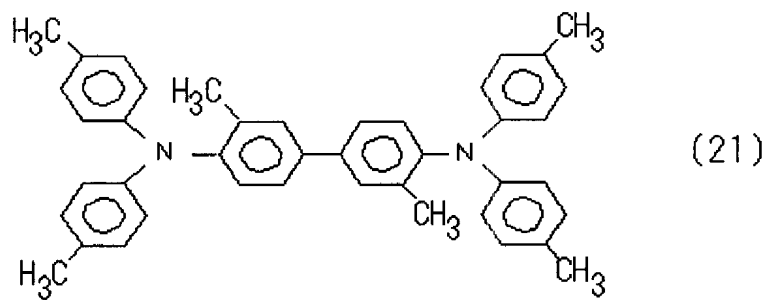


[0050]

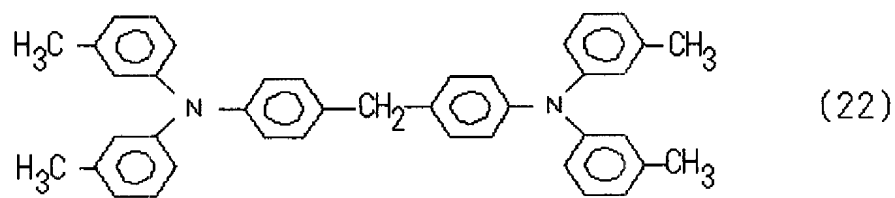


[0051]

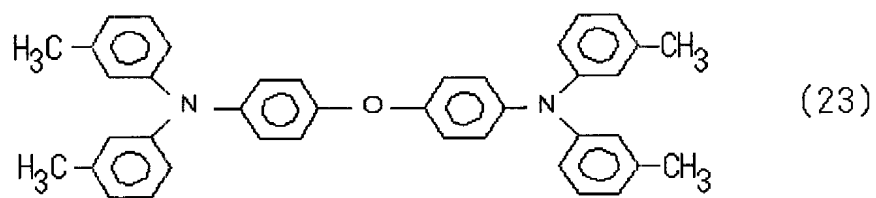


[0052]

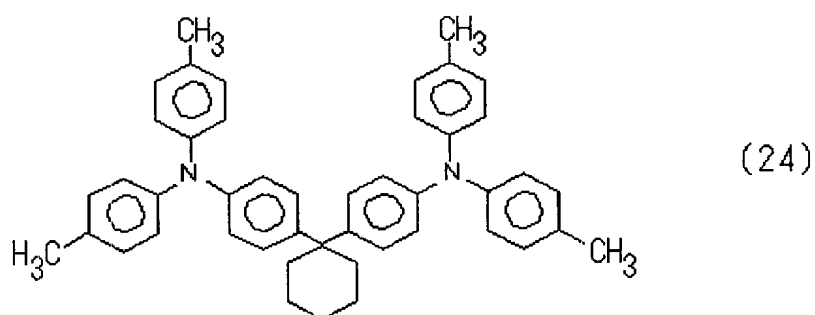


[0053]

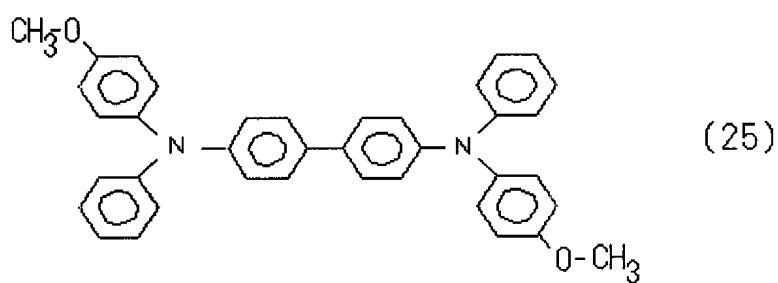


[0054]

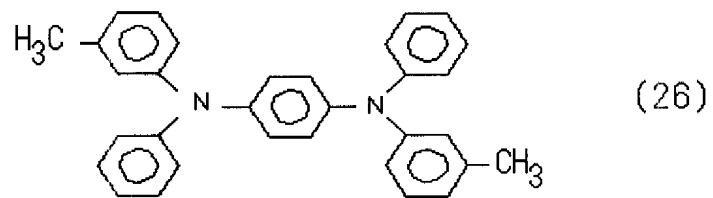


[0055]

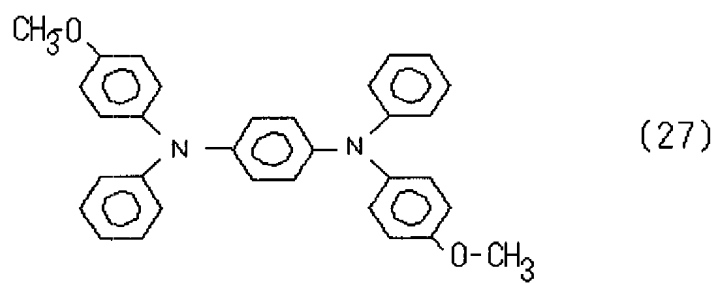

[0056]

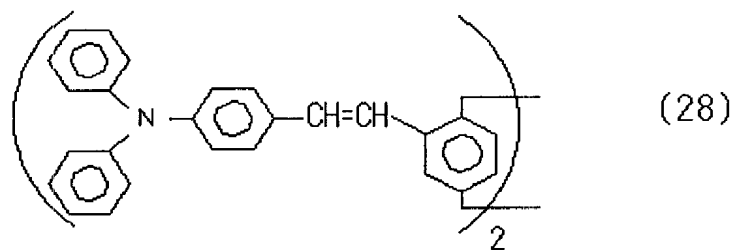


[0057]

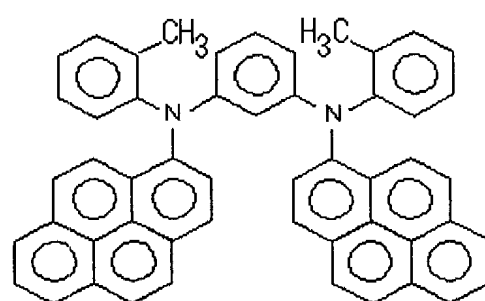


(29)

[0058]

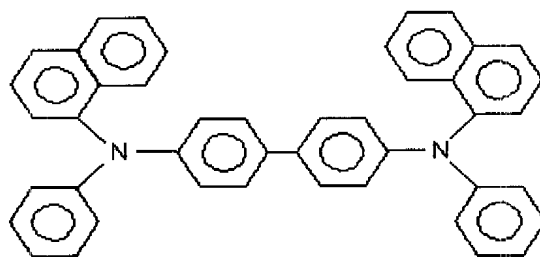


(30)

[0059]

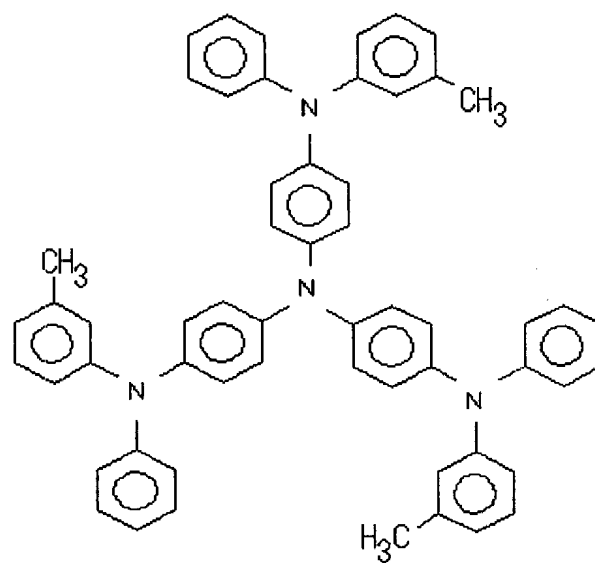

(31)


[0060]

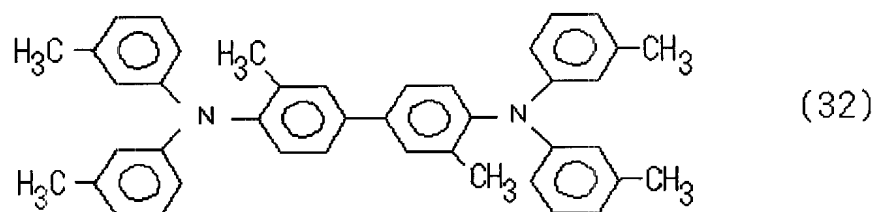


[0061]

In the embodiment, the ingredient contained in the electron transport layer 6 can be selected from the materials represented, for example, by the following formulae (33) to (51).


[0062]

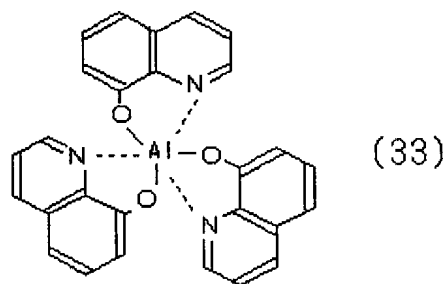


[0063]

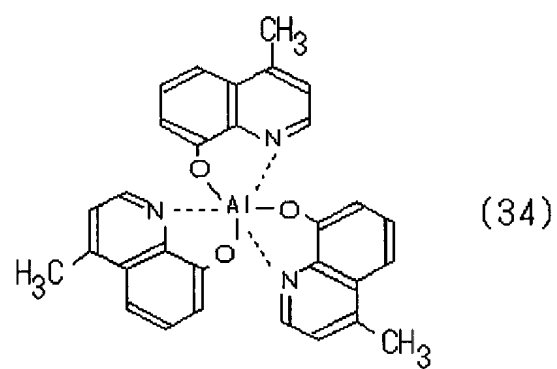


[0064]

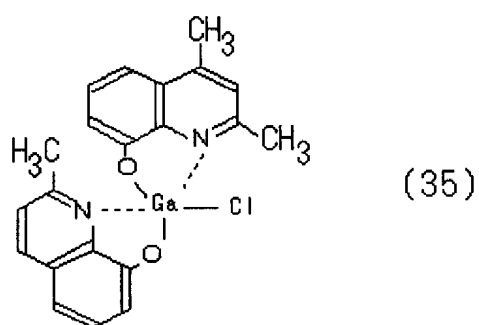


[0065]

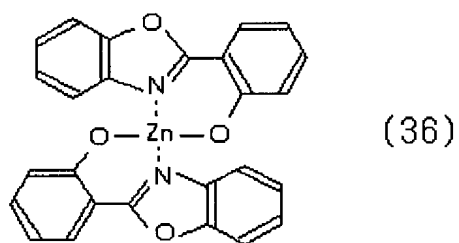


[0066]

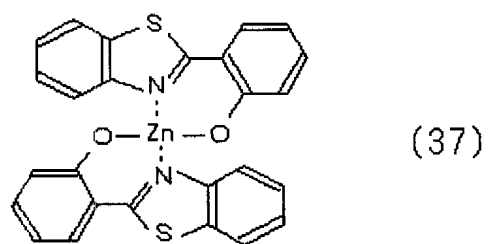


[0067]

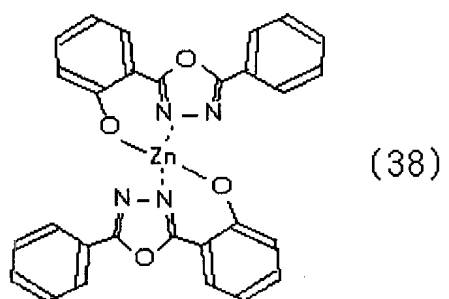


[0068]

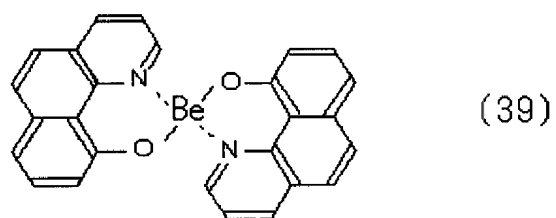


[0069]

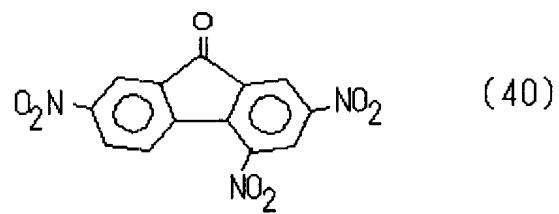


[0070]

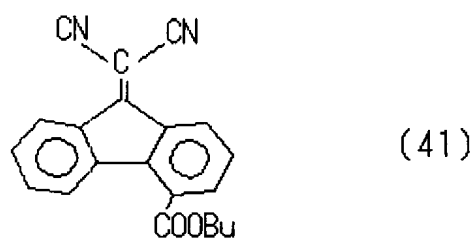


[0071]

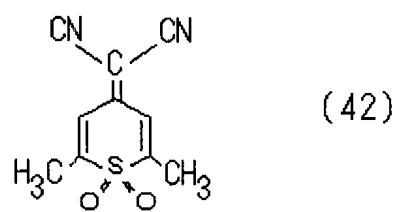


[0072]

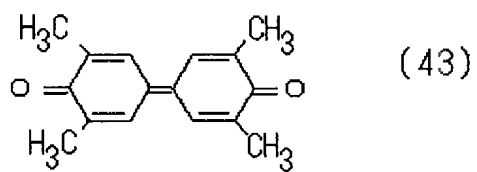


[0073]

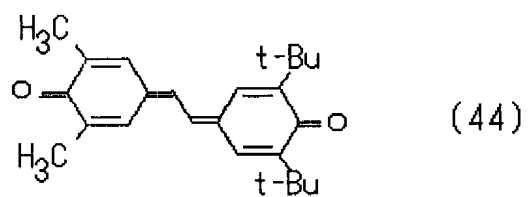


[0074]

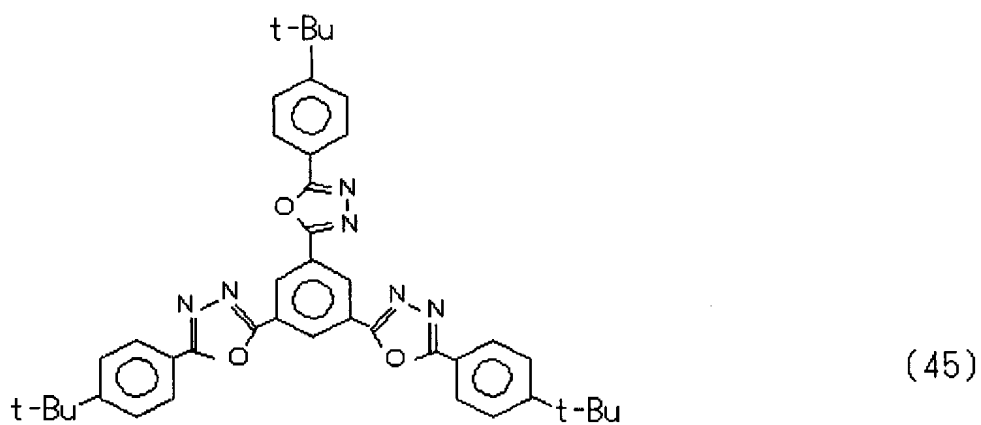


[0075]

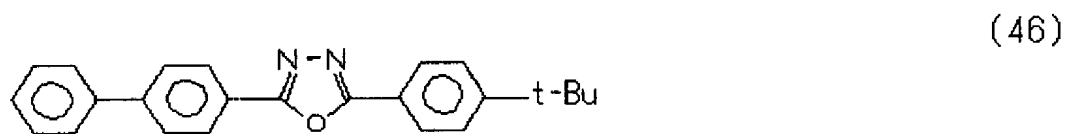


[0076]

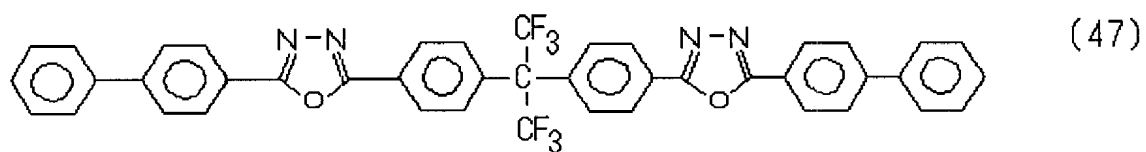


[0077]

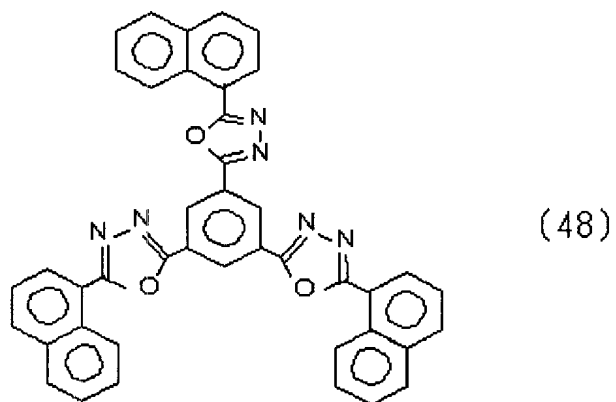


[0078]

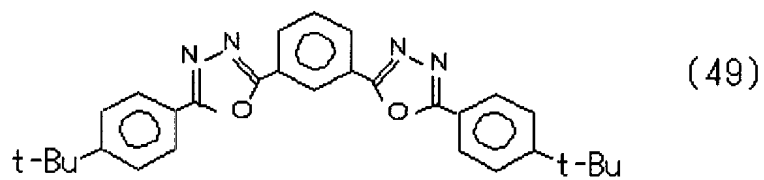

[0079]

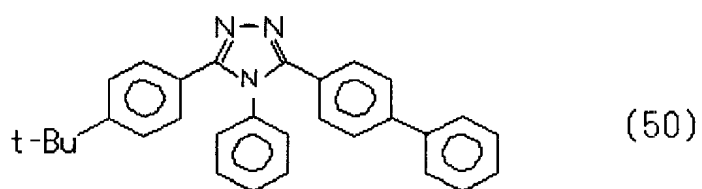


[0080]

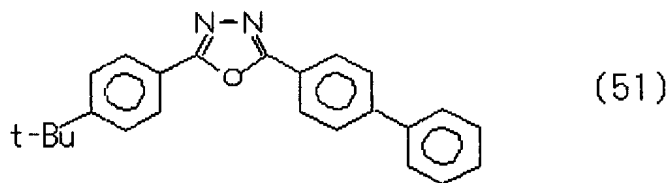


[0081]

In the formulae described above, Bu represents a butyl group and t-Bu represents a tertiary butyl group. Further, the organic material having the electron transportability also includes aluminum chelate complexes represented by the following formulae (52) to (87).


[0082]

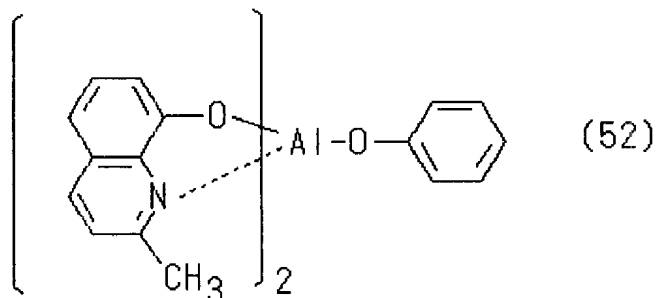


[0083]

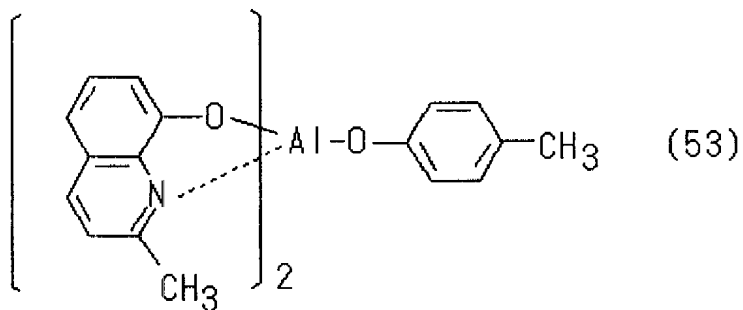


[0084]

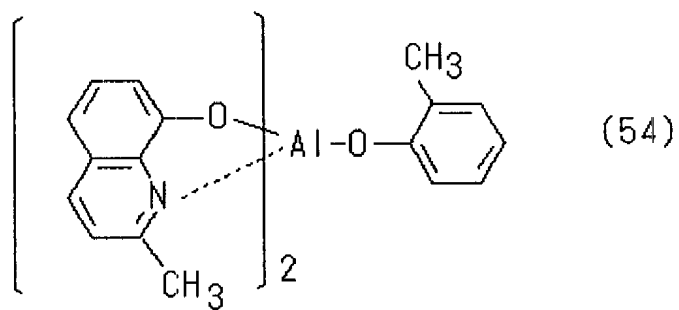


[0085]

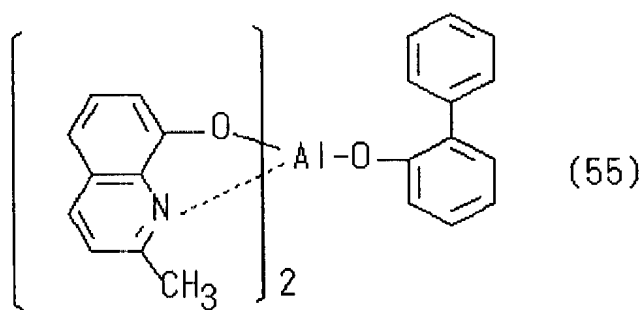


[0086]

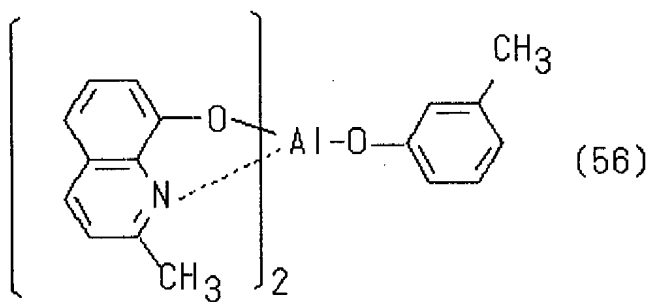


[0087]

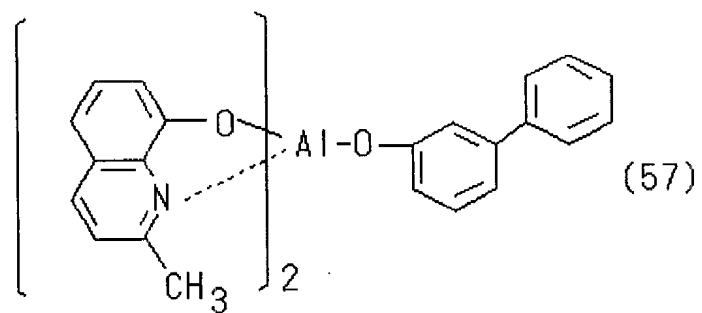


[0088]

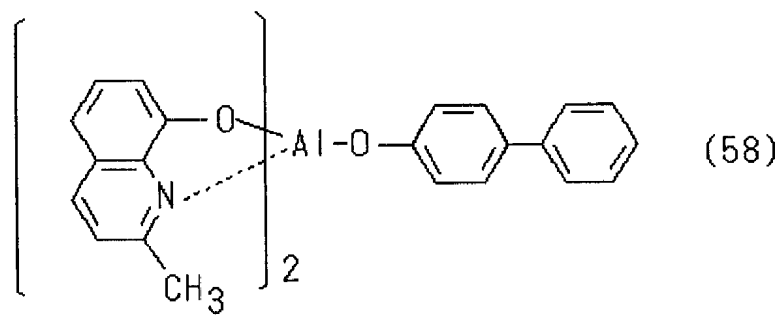


[0089]

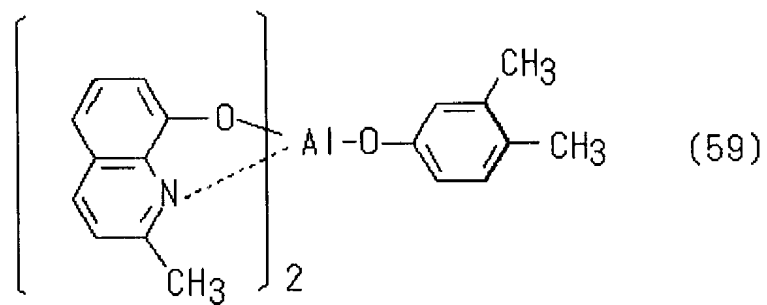


[0090]

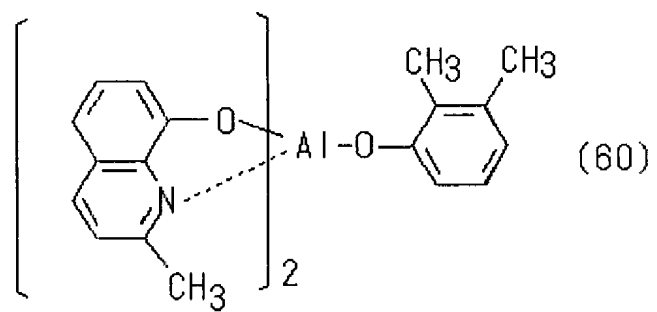


[0091]

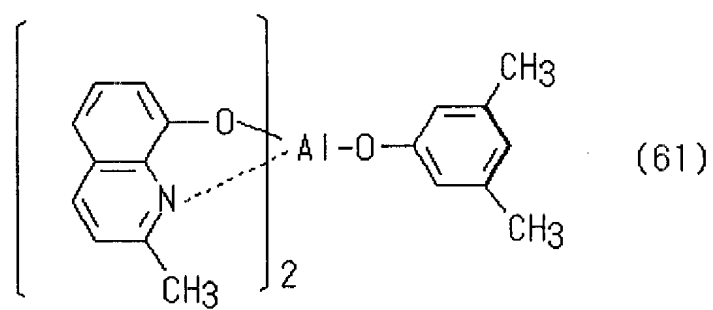


[0092]

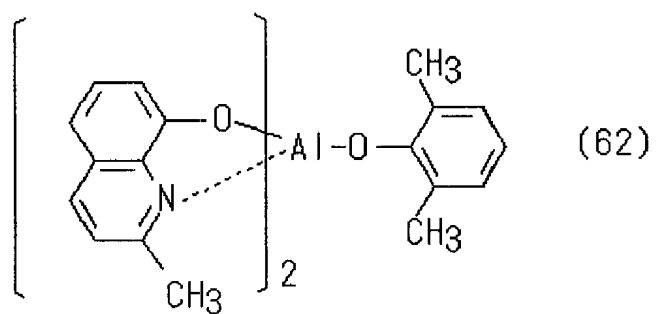


[0093]

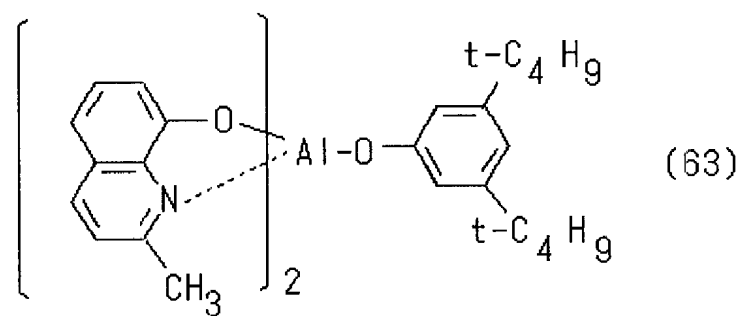


[0094]

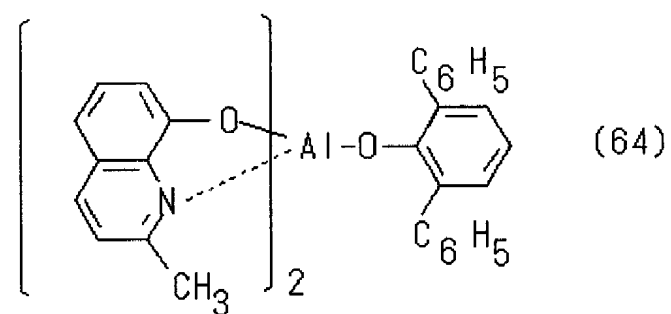


[0095]

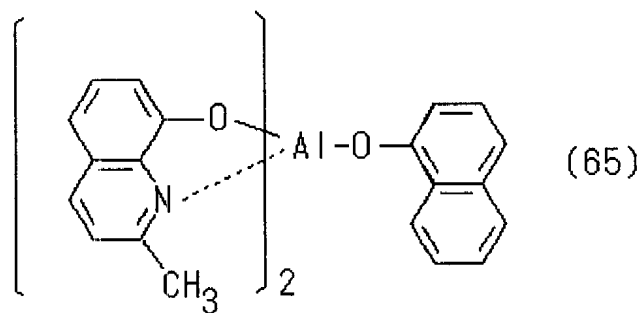


[0096]

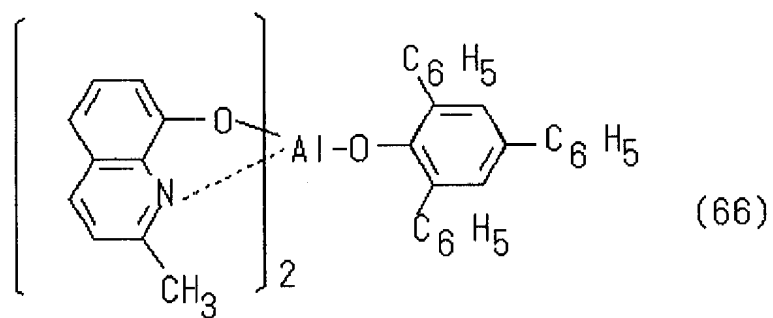


[0097]

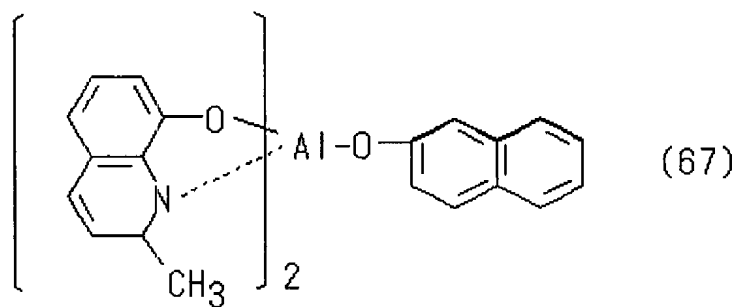


[0098]

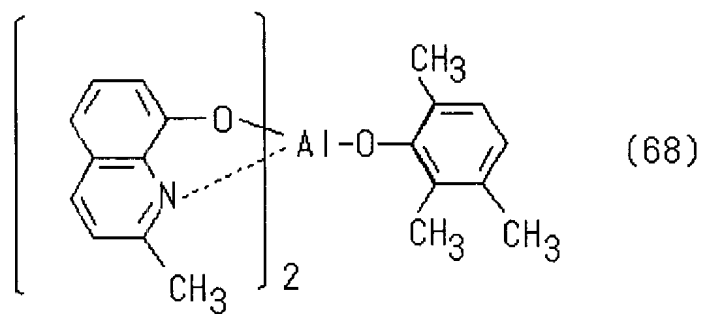


[0099]

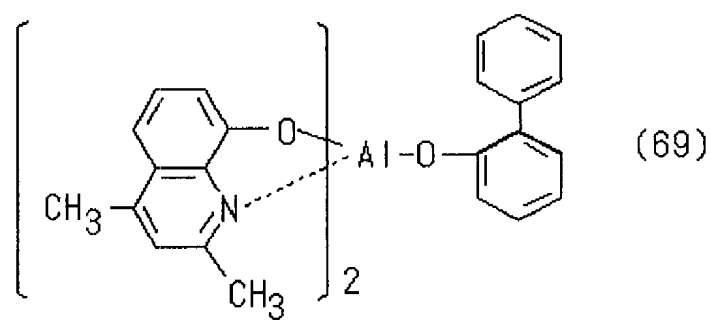


[0100]

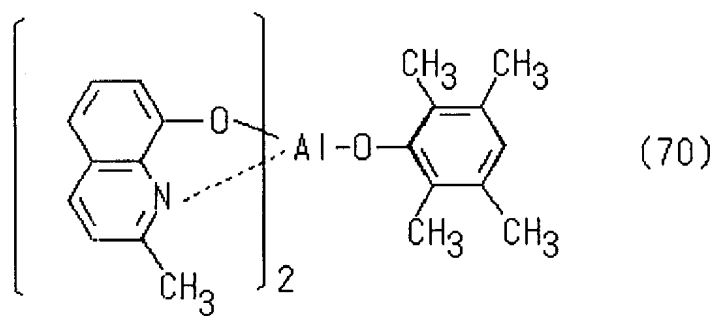


[0101]

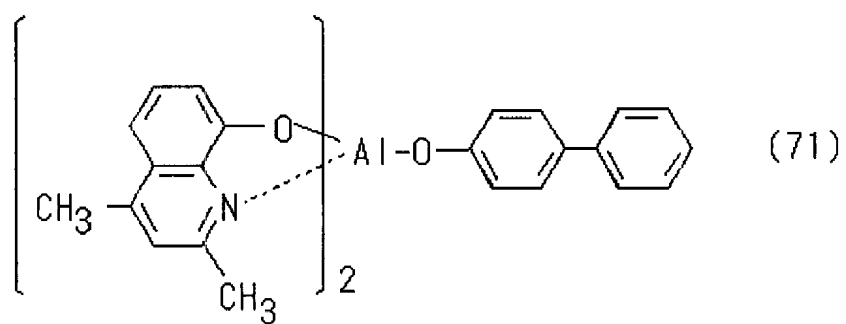


[0102]

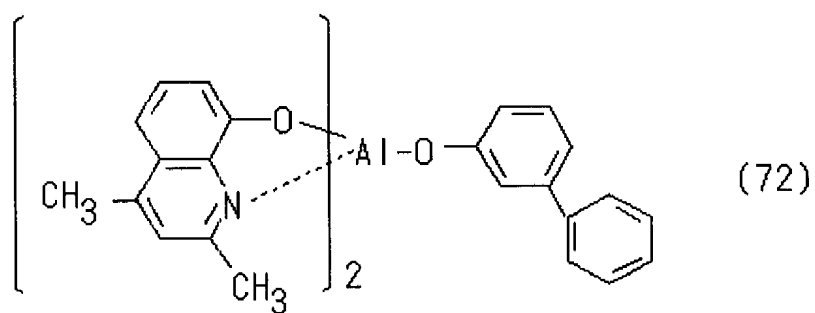


[0103]

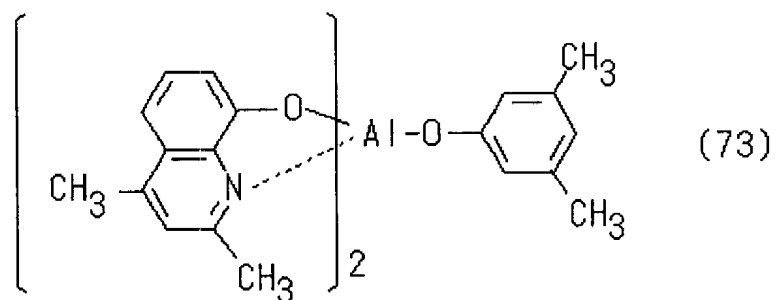


[0104]

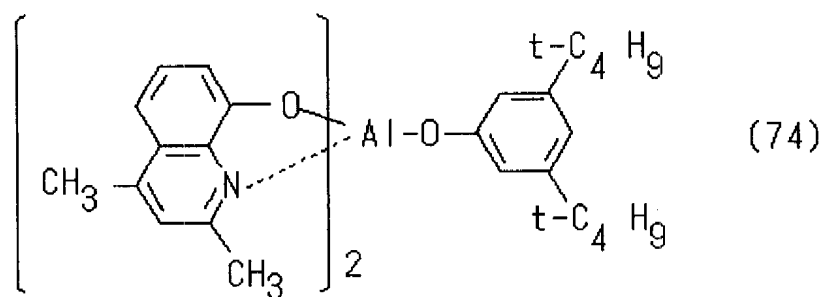


[0105]

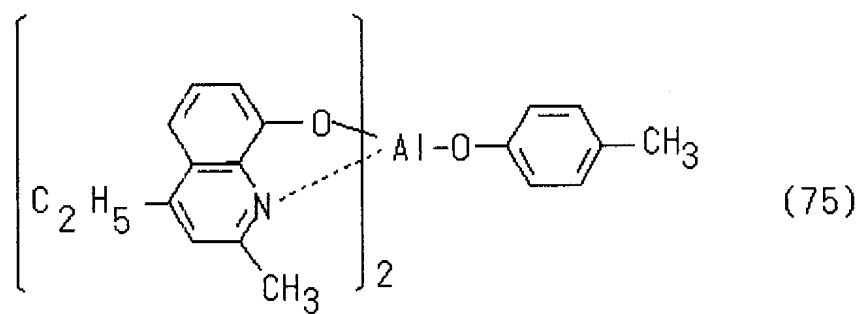


[0106]

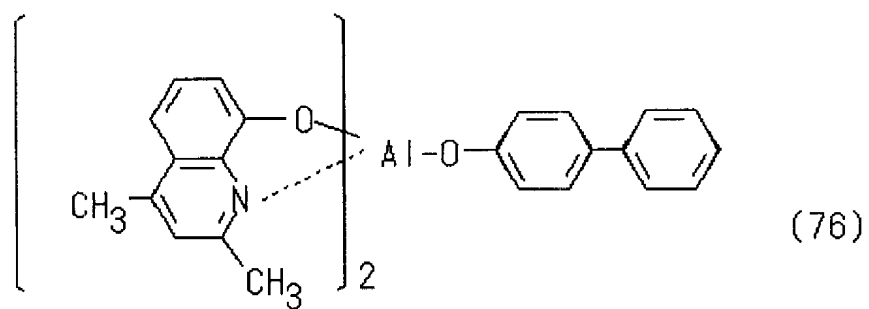


[0107]

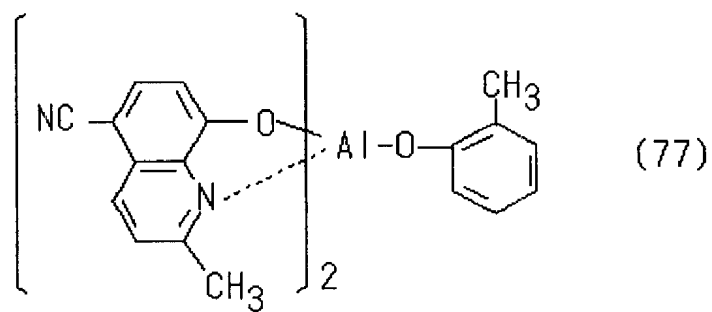


[0108]

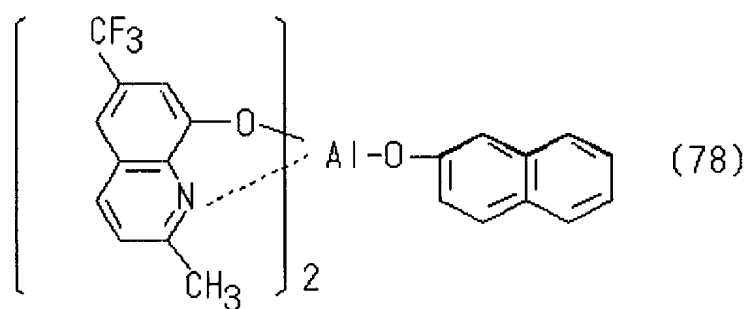


[0109]

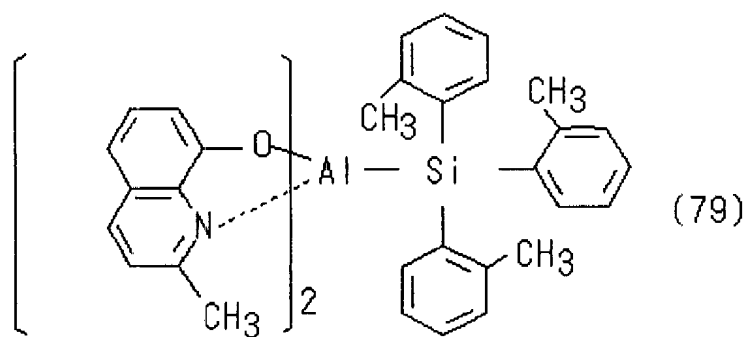


[0110]

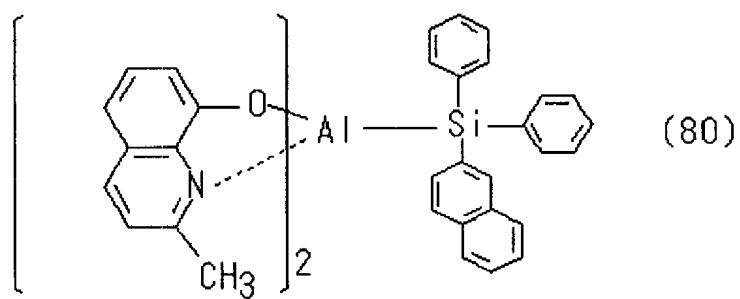


[0111]

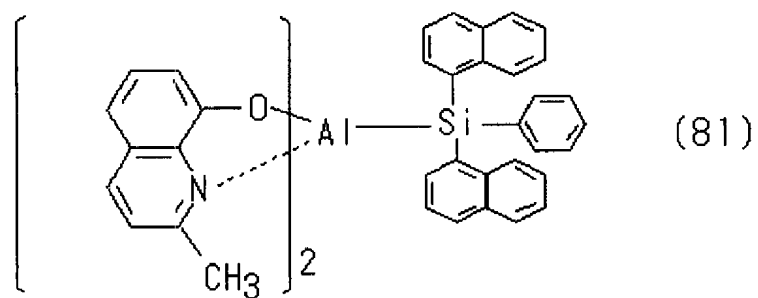


[0112]

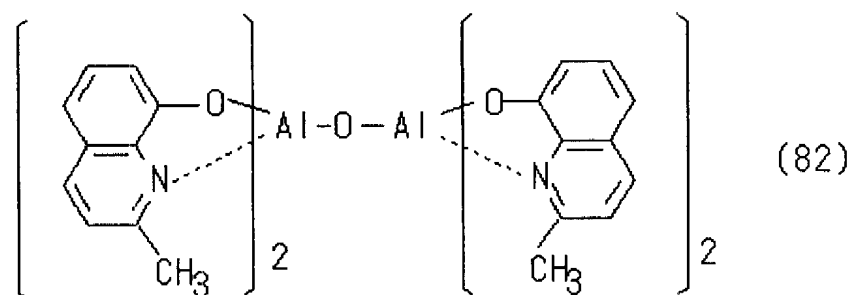


[0113]

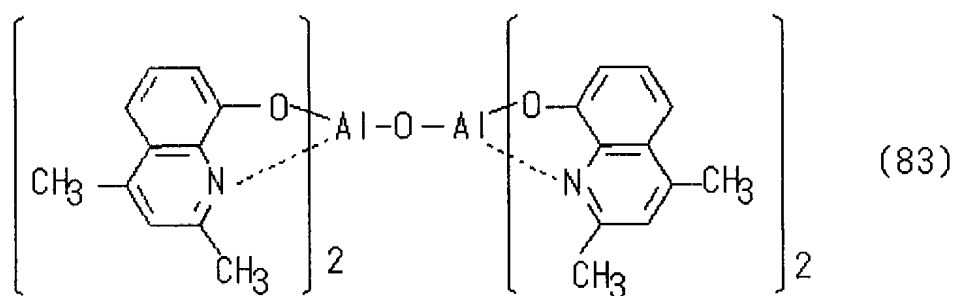


[0114]

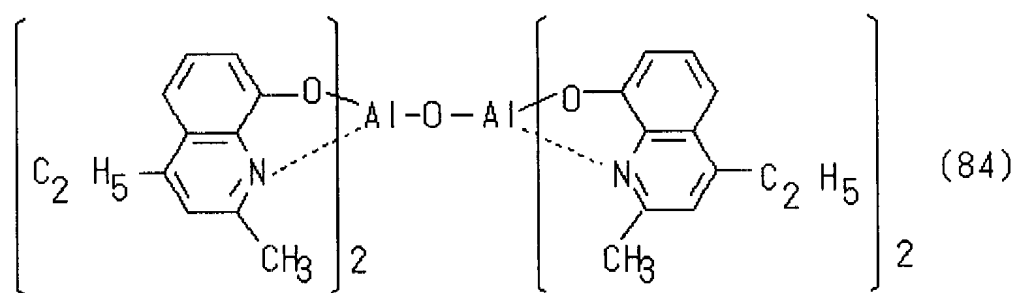


[0115]

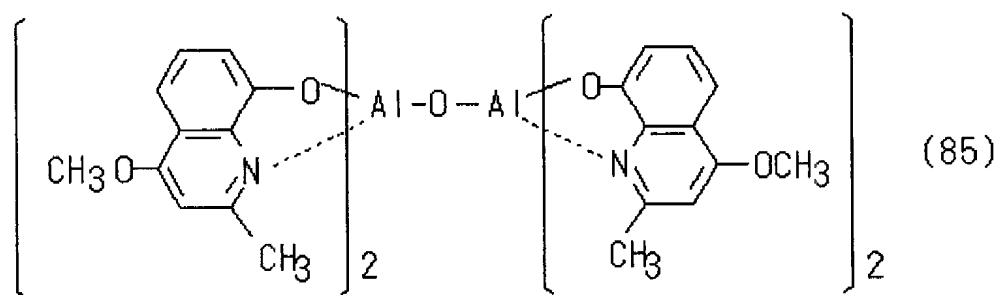

[0116]

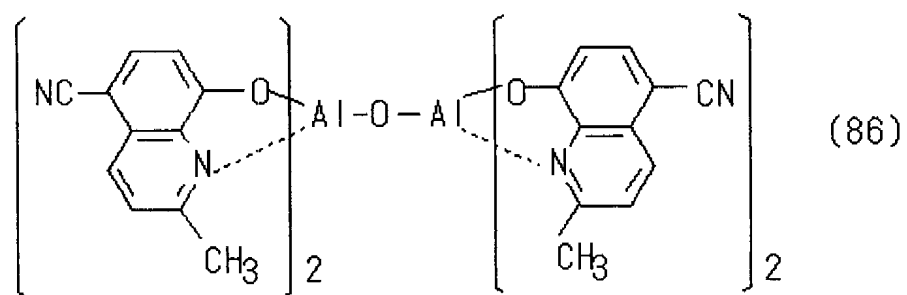


[0117]

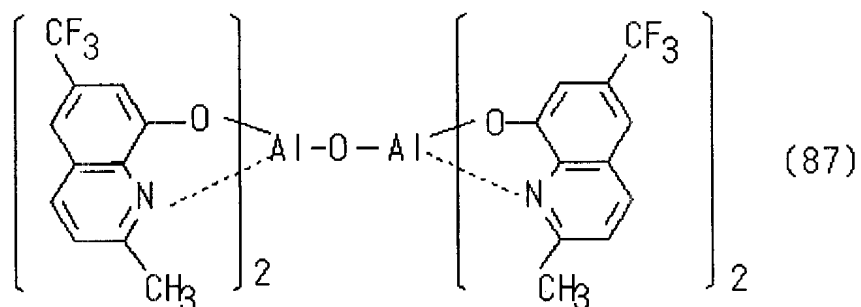


[0118]

Further, the organic material having the electron transportability usable for the electron transport layer 6 can also be selected from phenanthroline derivatives represented by the following formulae (88) to (96):


[0119]

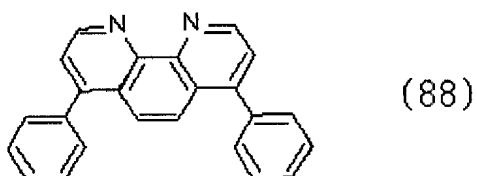


[0120]

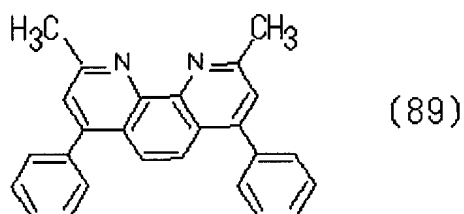


[0121]

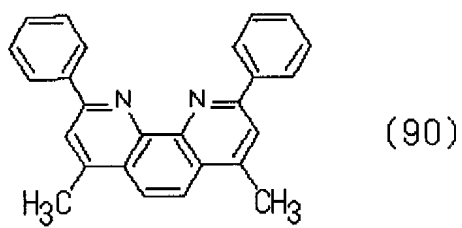


[0122]

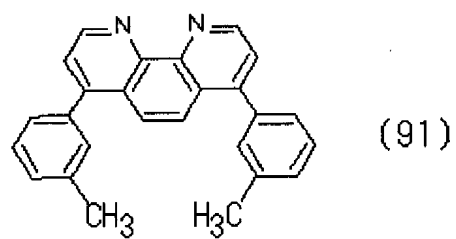


[0123]

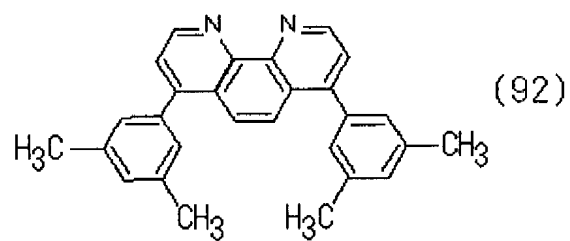


[0124]

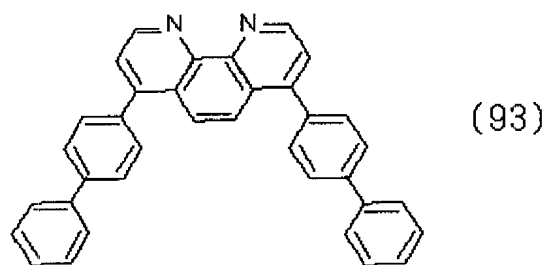


[0125]

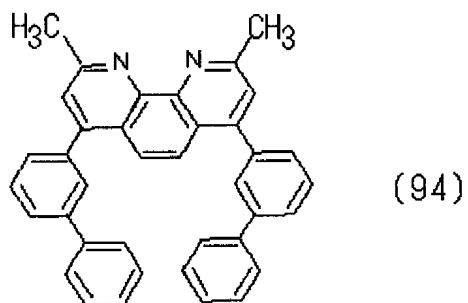

[0126]

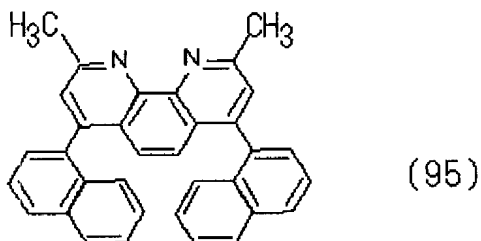


[0127]

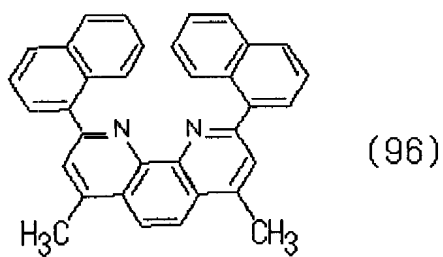


[0128]

The phosphorescent organic guest material for use in light emitting layer 4 can also be selected from the compounds shown by the structural formulae (2) to (6), for example, materials shown by the following formulae (97) to (106):


[0129]

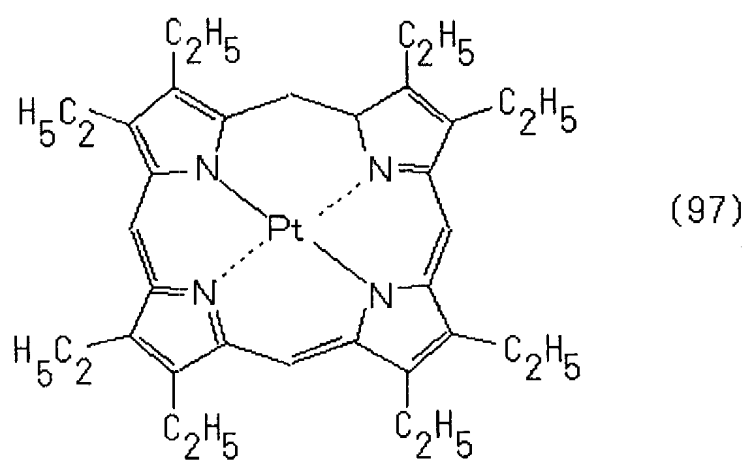


[0130]

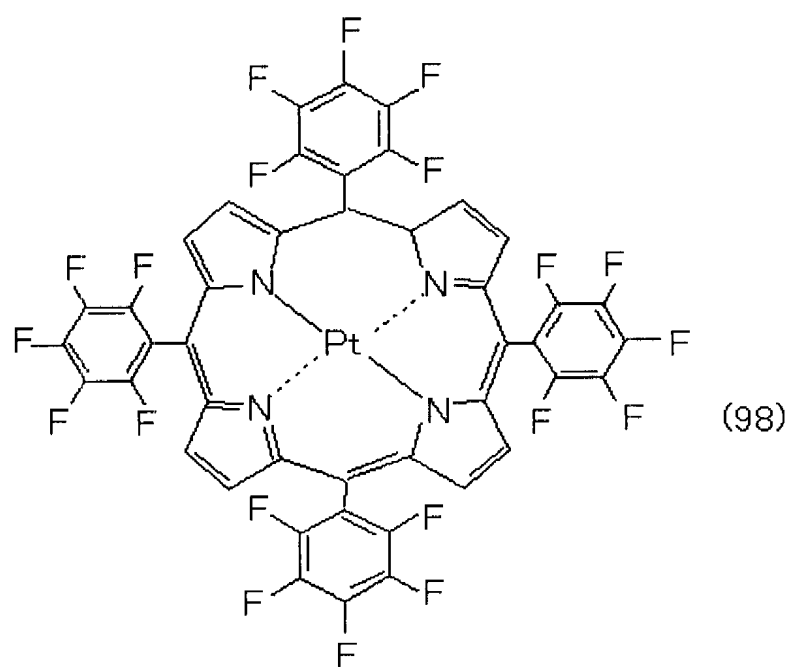


[0131]

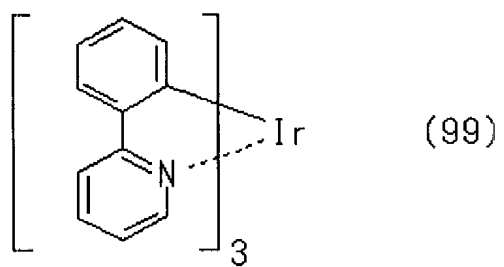


[0132]

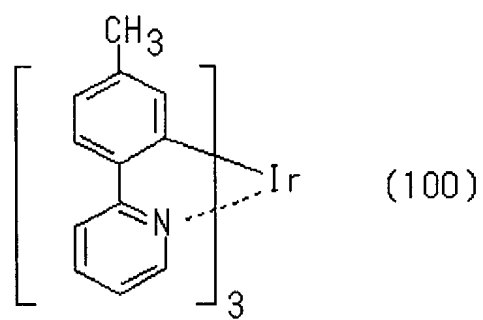


[0133]

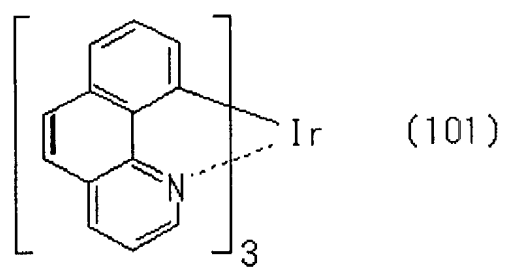


[0134]

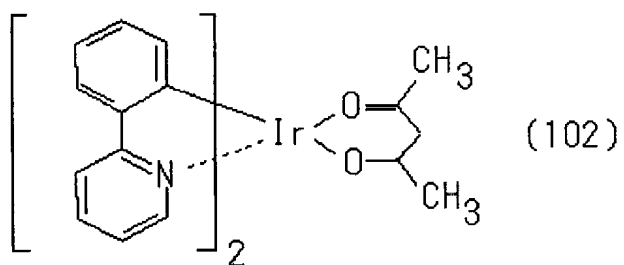


[0135]

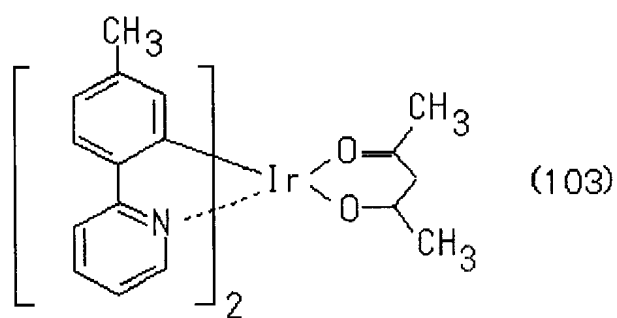


[0136]

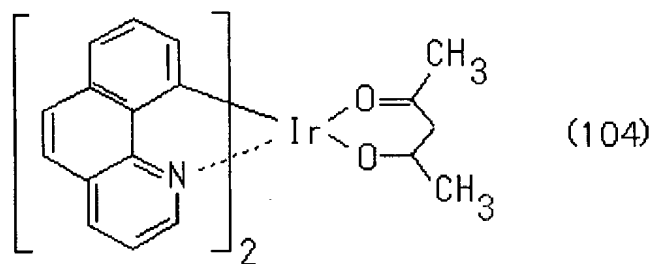

[0137]

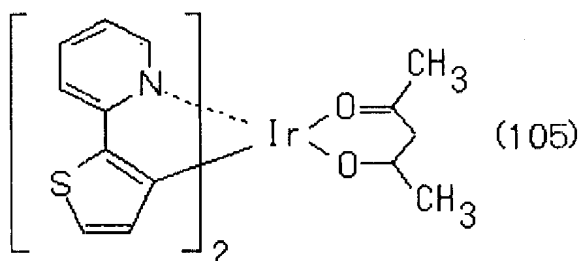

[0138]

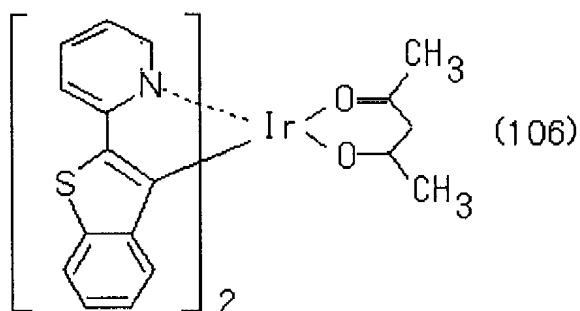

[0139]

< Example 1 >

Plural organic EL devices were manufactured as samples specifically and light emitting characteristics thereof were evaluated.

For the samples, copper phthalocyanine (CuPc) was used as the hole injection layer, NPB was used as the hole transport layer and Alq3 was used as the electron transport layer. In common with the samples, thin films of the respective materials were stacked successively on a glass substrate formed with an anode made of ITO with a film thickness of 1100 Å by vacuum vapor deposition at a vacuum degree of 5.0×10^{-6} Torr.

[0140]

At first, in sample 1, CuPc was deposited as a film to 250 Å thickness on a ITO cathode at a vapor deposition rate of 3 Å/sec, to form a hole injection layer.

Then, NPB was deposited as a film to 550 Å thickness on a CuPc hole injection layer at a vapor deposition rate of 3 Å/sec to form a hole transport layer.

Then, on the NPB hole transport layer, an organic host material of the structural formula (1) and an organic guest material XT emitting red phosphorous among the compounds shown by the structural formula (6) were co-deposited from different vapor deposition sources to 475 Å thickness to form a light emitting layer. In this process, the concentration of the organic guest material XT in the light emitting layer was 7 wt%.

[0141]

Then, on the mixed light emitting layer, Alq3 was vapor deposited to 300 Å thickness at a vapor deposition rate of 3 Å/sec to form an electron transport layer.

Further, on the Alq3 electron transport layer, lithium oxide (Li_2O) was vapor deposited as an electron injection layer to 10 Å at a vapor deposition rate of 0.1 Å/sec and, further thereon, aluminum (Al) was stacked as the cathode to 1000 Å at 10 Å/sec, to manufacture an organic light emitting device of the example.

[0142]

As a comparative example, a device of comparative example

identical with that of Example 1 was also manufactured except for using BA1q for the organic host material in the mixed light emitting layer.

Light emitting characteristics of the devices of Example 1 and the comparative example in a storage test at 100°C were evaluated.

Table 1 and Table 2 show the change of chromaticity, luminance and voltage relative to lapse of time in a case of driving the devices of Example 1 and Comparative Example at 5.5 mA/cm² respectively.

[0143]

Table 1

Lapse of time (hours)	Chromaticity diagram		Luminance (cd/m ²)	Driving voltage (V)
	CIE _x	CIE _y		
0	0.676	0.321	326	8.41
63	0.676	0.323	322	7.70
159	0.673	0.324	292	7.24
324	0.672	0.325	239	7.09
500	0.667	0.328	197	6.86

[0144]

Table 2

Lapse of time (hours)	Chromaticity diagram		Luminance (cd/m ²)	Driving voltage (V)
	CIE _x	CIE _y		
0	0.678	0.321	337	9.20
63	0.677	0.323	269	6.93
159	0.576	0.386	66	6.51
324	0.528	0.416	63	6.79
500	0.525	0.423	65	6.92

[0145]

When the organic EL device of the example was stored under the circumstance at 100°C, the luminance was lowered by 40% relative to the initial value at lapse of 500 hrs. Further, change of the chromaticity was also observed scarcely in the example.

On the contrary, for the lowering of the luminance of the device of the comparative example, the luminance was lowered by 80% relative to the initial value at lapse of 160 hrs at 100°C. Further, change of chromaticity was observed and the emission color changed from red to yellow.

[0146]

The glass transition temperature T_g of the structural formula (1) of the organic host material is 113°C and the glass transition temperature T_g of BALq is 99°C. It is considered that since the organic host material of the light emitting layer of the example had higher T_g than that of the comparative example and the physical and electrical characteristics of the thin film in the organic EL device were stable, the degradation of luminance during continuous driving was suppressed and the driving life was improved compared with the device of the comparative example.

[0147]

Further, since the organic host material shown by the structural formula (1) had a ligand of longer conjugation system compared with BALq used in the comparative example, it is excellent in the electron transportability.

The organic EL device using the organic host material shown

by the structural material (1) as the light emitting layer had more preferred current luminance characteristics than those of the device using BA1q as the light emitting layer and suffered from less lowering of efficiency, particularly, in a higher luminance region exceeding 300 cd/m².

< Example 2 >

A devices was manufactured quite in the same manner as Example 1 except for using 2,3,7,8,12,13,17,18-octaethyl-21H,23H-porphinePlatinum (II) (so-called PtOEP), instead of the organic guest material XT, as the phosphorescent organic guest material under the identical condition.

[0148]

For the devices of Example 2 and the comparative example, Table 3 shows the light emitting characteristics during continuous driving at a constant current of 2.5 mA/cm², Fig. 4 shows voltage-luminance characteristics, and Fig. 5 shows current-luminance characteristics, respectively. The device of Example 2 using the material of the structural formula (1) of the invention for the host material in the light emitting layer had more satisfactory voltage-luminance characteristics and current characteristics compared with the device of the comparative example. That is, the device of high efficiency and low driving voltage could be obtained by using the material shown by the structural formula (1) as the host material of the light emitting layer.

[0149]

Table 3

	Chromaticity diagram		Luminance (cd/m ²)	Quantum efficiency (%)	Driving voltage (V)
	CIE _x	CIE _y			
Example 2	0.695	0.294	43	5.35	8.85
Comp. Example	0.709	0.283	38	4.89	9.66

[0150]

Fig. 6 shows the change of degradation of luminance and driving voltage during continuous driving at a constant current of 7.5 mA/cm². At the lapse of 300 hrs, both the device of Example 2 and the device of the comparative example maintained 95% or more of the initial luminance. For the driving voltage, it increased by 6.4% at the lapse of time of 300 hrs in the device of the comparative example, whereas it was suppressed to 3.5% in the device of Example 2. Change of the driving voltage (increase) is one of parameters showing the degradation of the material along with continuous driving.

[0151]

[Effect of the Invention]

As has been described above, according to the present invention, since the organic host material of an aluminum chelate complex of the specified structure shown by the structural formula (1) is used as the main ingredient of the light emitting layer in the organic EL device having the light emitting layer using the phosphorescent material for the organic guest material, it is excellent in heat resistance and can attain a long driving life while maintaining favorable light emitting characteristics.

[Brief Description of the Drawings]

Fig. 1 is a structural view showing an organic EL device according to the present invention.

Fig. 2 is a structural view showing an organic EL device according to the invention.

Fig. 3 is a structural view showing an organic EL device according to the invention.

Fig. 4 is a graph showing the voltage-luminance characteristics of the organic EL device in Example 2 according to the invention.

Fig. 5 is a graph showing the current-luminance characteristics of the organic EL device in Example 2 according to the invention.

Fig. 6 is a graph showing characteristics for deterioration of luminance and driving voltage of the organic EL device in Example 2 according to the invention.

[Explanation of Symbols]

- 1 glass substrate
- 2 transparent electrode (anode)
- 3 hole transport layer
- 3a hole injection layer
- 4 organic light emitting layer
- 6 electron transport layer
- 7 metal electrode (cathode)
- 7a electron injection layer

[Document Name] ABSTRACT


[Abstract]

[Object] It is to provide an organic electroluminescence device capable of prolonging the life.


[Measure taken to attain the Object] An organic electroluminescence device of a long emission life is obtained by stacking an anode, a hole transport layer comprising an organic compound, a light emitting layer comprising an organic compound, an electron transport layer comprising an organic compound, and a cathode, in which the light emitting layer comprises an organic host material of an aluminum chelating complex of a specific structure and a phosphorescent organic guest material.

[Selected Drawing] Fig. 1


【FIG. 1】

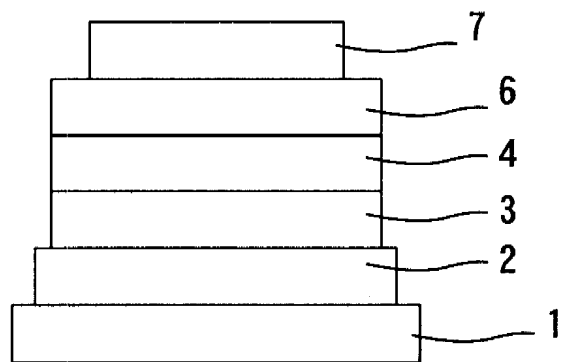


【FIG. 2】

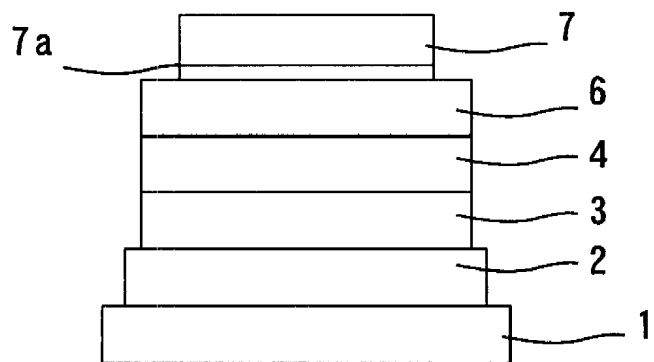


【FIG. 3】

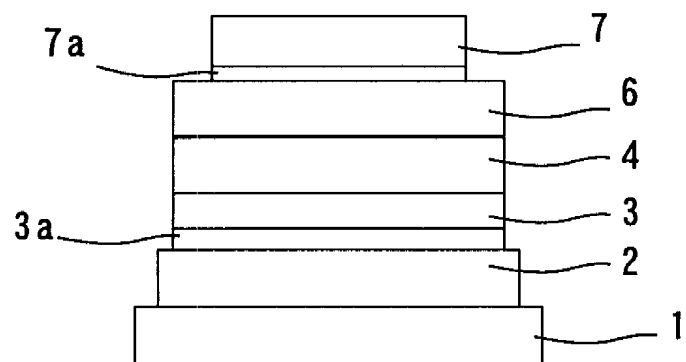

【FIG. 4】

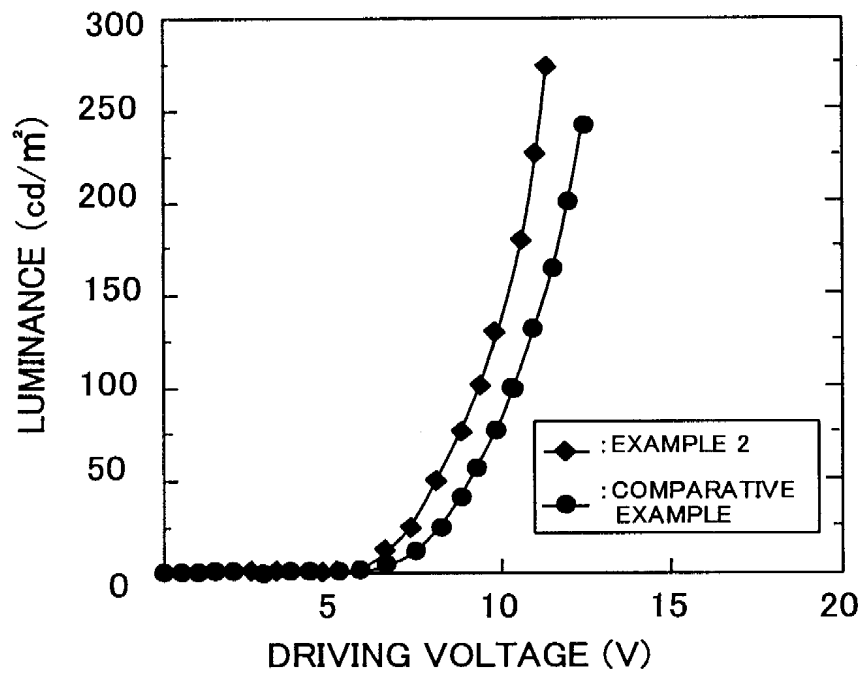

【FIG. 5】

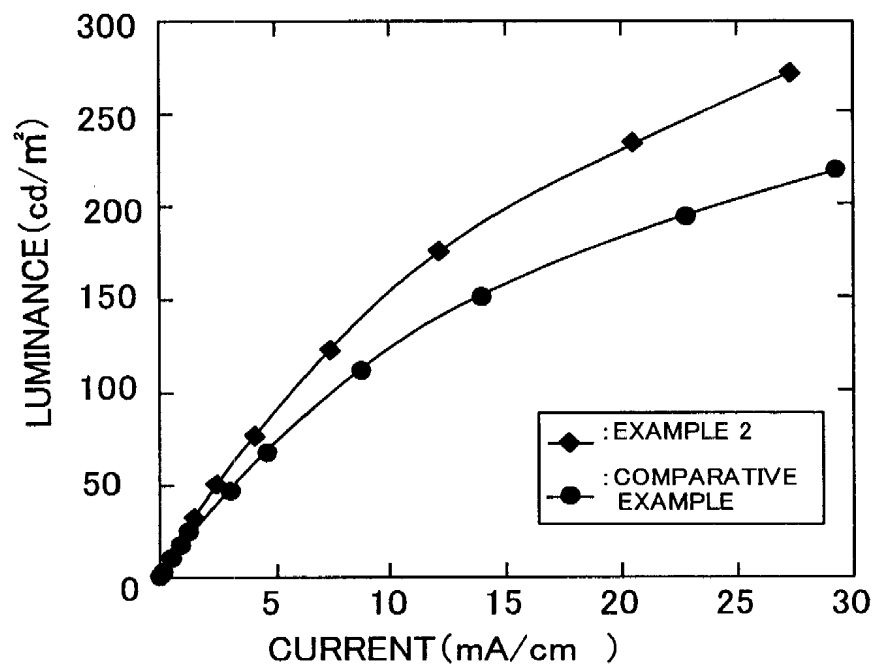

【FIG. 6】

